


30 & 50 Watt Fixed Attenuators FH Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR (maximum)	RF Connectors
50FH-XXX-30	DC-2000 MHz	1 thru 50 dB in any 1 dB increment	+/- 0.5 dB	1.3:1 DC-1000 MHz 1.4:1 1000-2000 MHz	BNC, N, TNC, 7/16 or SMA
50FH-XXX-30-3	DC-3000 MHz	1 thru 50 dB in any 1 dB increment	+/- 0.5 dB	1.4:1	BNC, N, TNC, 7/16 or SMA
50FH-XXX-50	DC-2000 MHz	1 thru 50 dB in any 1 dB increment	+/- 0.5 dB	1.3:1 DC-1000 MHz 1.4:1 1000-2000 MHz	BNC, N, TNC, 7/16 or SMA
50FH-XXX-50-3	DC-3000 MHz	1 thru 50 dB in any 1 dB increment	+/- 0.5 dB	1.4:1	BNC, N, TNC, 7/16 or SMA


* (XXX) insert attenuation value

Model	Impedance	Input Power (average)	Peak Power	Operating Temperature
50FH-XXX-30 and -30-3	50 Ohms	30 Watts @ +25° C	1000 Watts	-55° C to +100° C
50FH-XXX-50 and -50-3	50 Ohms	50 Watts @ +25° C	1000 Watts	-55° C to +100° C

50FH-XXX-30

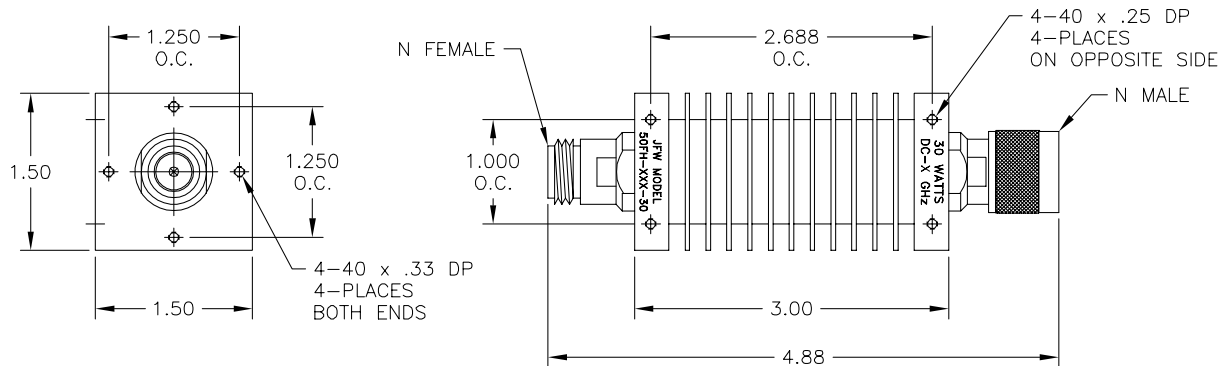

50FH-XXX-50

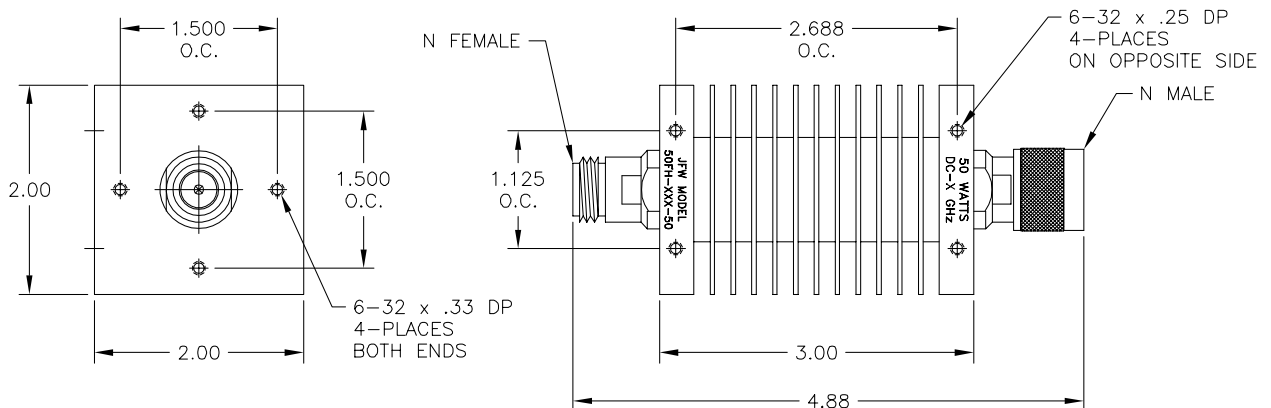

This represents only 10% of our products. For YOUR application, contact JFW at 1-877-887-4JFW or sales@jfwindustries.com