


# 1 Watt Fixed Attenuators F Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy (maximum)	VSWR (maximum)	RF Connectors
50F-XXX	DC-2200 MHz	1 thru 20 dB in any 1 dB increment	± 0.5 dB DC-1000 MHz ± 0.8 dB 1000-2200 MHz	1.2:1 DC-1000 MHz 1.4:1 1000-2200 MHz	BNC, N, SMA or TNC
50F-XXX	DC-1000 MHz	21 thru 30 dB in any 1 dB increment	± 0.5 dB or 2%	1.2:1	BNC, N, SMA or TNC


\* (XXX) insert attenuation value

Common Specifications			
Impedance	Input Power (@ +25° C)	Peak Power	Operating Temperature
50 Ohms	1 Watt	1000 Watts	-55° C to +125° C


**50F-XXX BNC**

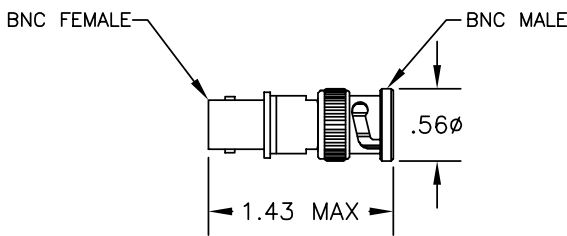

**50F-XXX SMA**

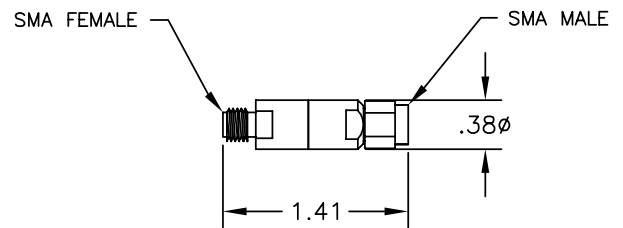

**50F-XXX TNC**

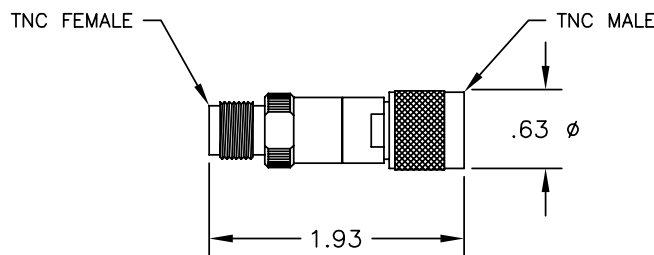

**BUY ONLINE AT**  
[www.jfwindustries.com](http://www.jfwindustries.com)

**50F-XXX N**

