

SPECIFICATION SHEET

JFW MODEL 50PA-513

PROGRAMMABLE ATTENUATOR ASSEMBLY

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	200-6000 MHz
Configuration	Four individually controlled solid-state programmable attenuators
Impedance	50 Ohms nominal
Attenuation Range	0-63 dB in 1 dB steps
VSWR	1.8:1 maximum 200-800 MHz 1.6:1 maximum 800-6000 MHz
Attenuation Accuracy (guaranteed monotonic)	± 0.50 dB 1-3 dB ± 0.75 dB 4-7 dB ± 1.00 dB 8-11 dB ± 1.25 dB or 4% 12-63 dB (whichever is greater)
Insertion Loss	6.0 dB maximum 5.0 dB typical
RF Input Power	+20 dBm average +25 dBm (no damage)
Switching Speed	1 microsecond typical (after command is received and processed) (3 milliseconds typical processing time)
AC Supply	100-240 VAC @ 47-63 Hz
Manual Control	20-Button Keypad and LCD display
Remote Control	RS-232 (9600, 19200, or 38400 Baud) Ethernet (TCP, 10/100, up to 4 users)

--CONTINUED--

SPECIFICATION SHEET
JFW MODEL 50PA-513
PROGRAMMABLE ATTENUATOR ASSEMBLY

JFW Industries, Inc.
 Phone: 317-887-1340
 sales@jfwindustries.com
 www.jfwindustries.com

Remote Commands

Attenuator Control Commands:
 Set Attenuator, Set Attenuator with
 Response, Read Attenuator, Set All
 Attenuators, Read All Attenuators, Set
 Multiple Attenuator, Fade Attenuator,
 Variable Handover, Store, Recall

System Commands:
 Identification, Pause
 -RS-232 Only: Change Baud
 -Ethernet Only: Disconnect, Close,
 Message, Clear

RF Connector


SMA or N female

Operating Temperature Range

0°C to +50°C

Physical Size

See outline drawing 092-6249 (SMA)
 092-6293 (N)

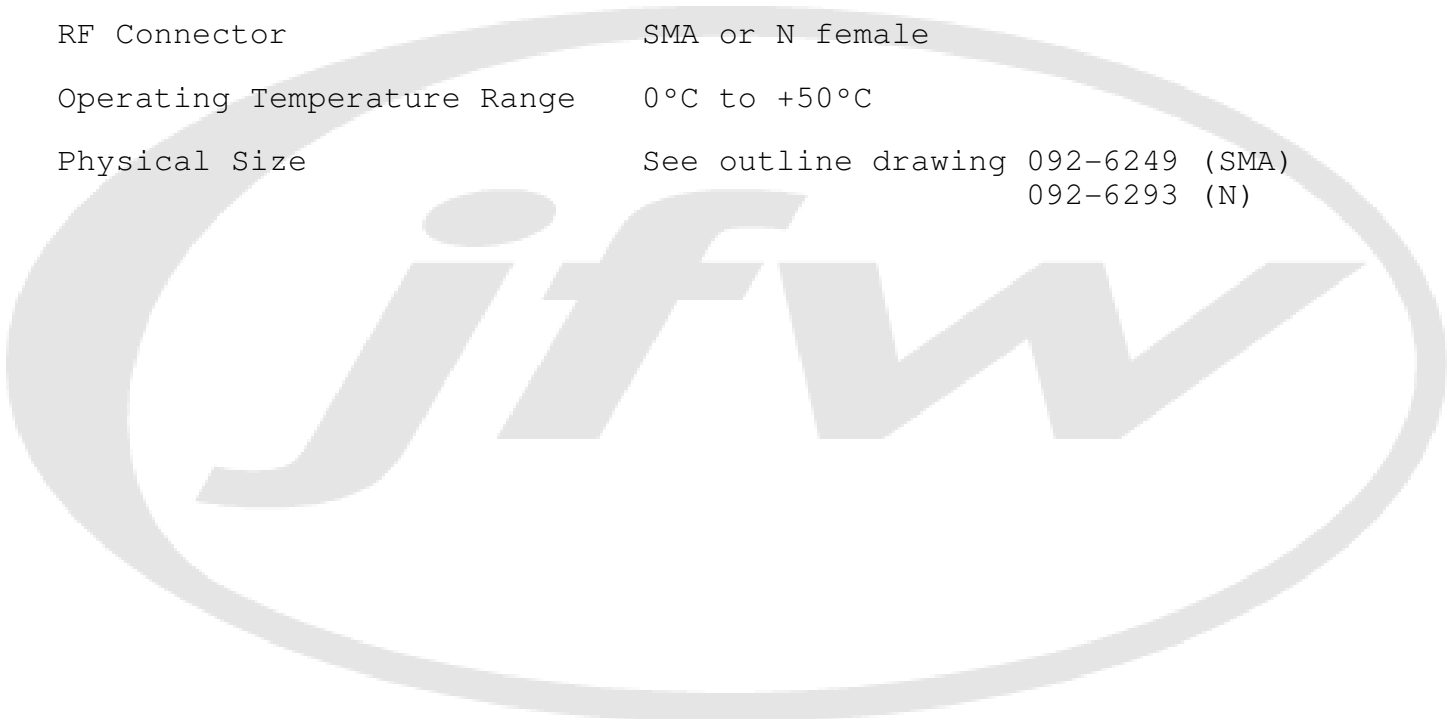

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	08/06/2009		CLK 08/06/2009	18154	01/22/2010	C	CLK 01/22/2010
17674	09/11/2009	A	CLK 09/11/2009				
17983	12/16/2009	B	CLK 12/16/2009				