

**High Peak Power**


# 5 & 10 Watt Fixed Attenuators FH Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR (maximum)	RF Connectors
50FH-XXX-5	DC-2000 MHz	1 thru 20 dB in any 1 dB increment	± 0.2 dB DC-500 MHz ± 0.5 dB 500-1000 MHz ± 0.8 dB 1000-2000 MHz	1.1:1 DC-500 MHz 1.2:1 500-1000 MHz 1.5:1 1000-2000 MHz	BNC, N, SMA, TNC or 7/16
50FH-XXX-5	DC-1000 MHz	21 thru 60 dB in any 1 dB increment	± 0.5 dB or 2% DC-500 MHz ± 4% 500-1000 MHz	1.2:1	BNC, N, SMA, TNC or 7/16
50FH-XXX-10	DC-2000 MHz	1 thru 20 dB in any 1 dB increment	± 0.2 dB DC-500 MHz ± 0.5 dB 500-1000 MHz ± 0.8 dB 1000-2000 MHz	1.1:1 DC-500 MHz 1.2:1 500-1000 MHz 1.5:1 1000-2000 MHz	BNC, N, SMA, TNC or 7/16

\* (XXX) insert attenuation value



Model	Impedance	Input Power (@ +25° C)	Peak Power	Operating Temperature
50FH-XXX-5	50 Ohms	5 Watts	2000 Watts	-55° C to +100° C
50FH-XXX-10	50 Ohms	10 Watts	2000 Watts	-55° C to +100° C

**50FH-XXX-5**

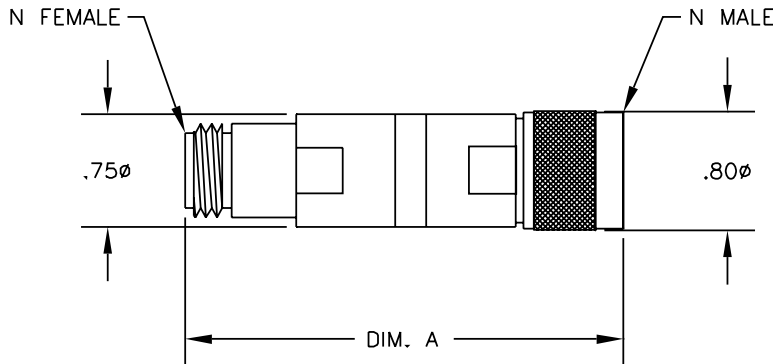

dB VALUE	DIM. A
0-30 dB	2.92
31-60 dB	4.04

**50FH-XXX-10**

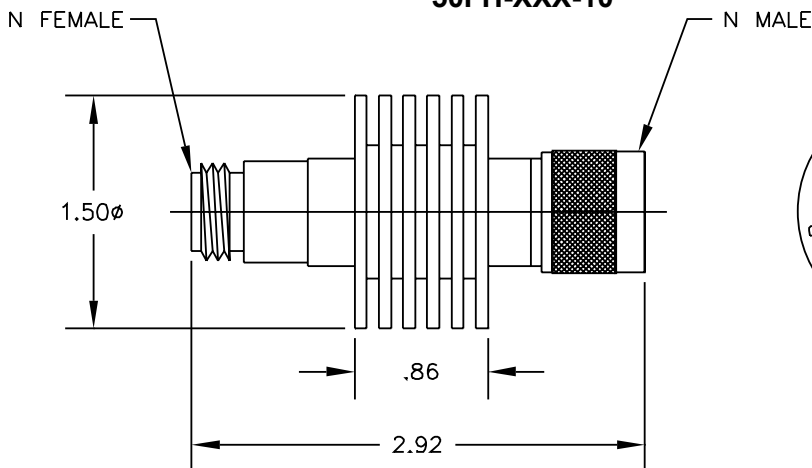

This catalog represents less than 5% of our products. For your application, contact us at [sales@jfwindustries.com](mailto:sales@jfwindustries.com)