


30 & 50 Watt Fixed Attenuators FH Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR (maximum)	RF Connectors
50FH-XXX-30	DC-2000 MHz	1 thru 50 dB in any 1 dB increment	± 0.5 dB	1.3:1 DC-1000 MHz 1.4:1 1000-2000 MHz	BNC, N, SMA, TNC or 7/16
50FH-XXX-30-3	DC-3000 MHz	1 thru 50 dB in any 1 dB increment	± 0.5 dB	1.4:1	BNC, N, SMA, TNC or 7/16
50FH-XXX-50	DC-2000 MHz	1 thru 50 dB in any 1 dB increment	± 0.5 dB	1.3:1 DC-1000 MHz 1.4:1 1000-2000 MHz	BNC, N, SMA, TNC or 7/16
50FH-XXX-50-3	DC-3000 MHz	1 thru 50 dB in any 1 dB increment	± 0.5 dB	1.4:1	BNC, N, SMA, TNC or 7/16


* (XXX) insert attenuation value

Model	Impedance	Input Power (average)	Peak Power	Operating Temperature
50FH-XXX-30 and -30-3	50 Ohms	30 Watts @ +25° C (derate to 15 Watts @ +85° C)	1000 Watts	-55° C to +100° C
50FH-XXX-50 and -50-3	50 Ohms	50 Watts @ +25° C (derate to 25 Watts @ +85° C)	1000 Watts	-55° C to +100° C

50FH-XXX-30

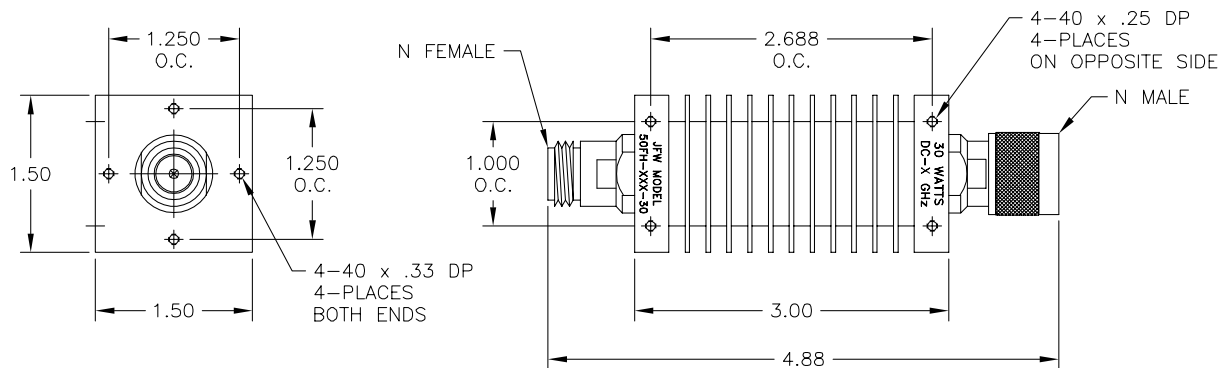

50FH-XXX-50

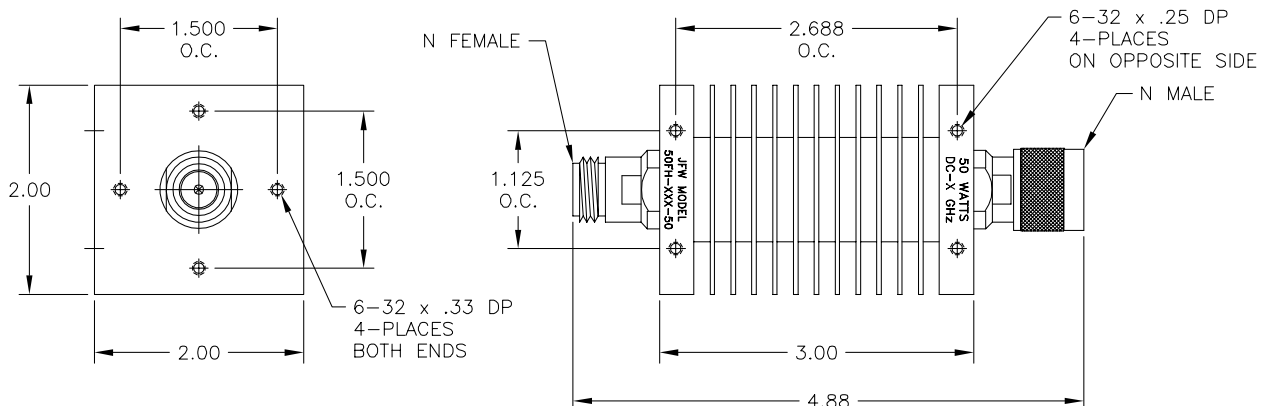

This catalog represents less than 5% of our products. For your application, contact us at sales@jfwindustries.com