
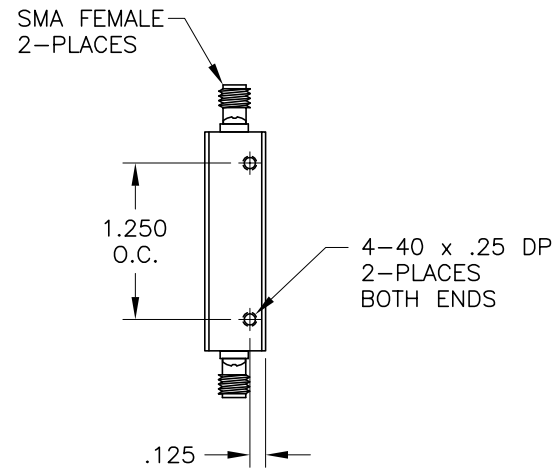
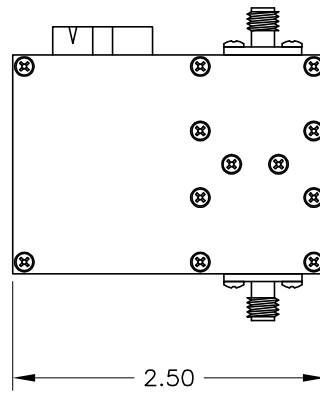



DETAIL A  
T&B #609-1057

PIN	FUNCTION
1	0.25dB TTL CONT.
2	0.5dB TTL CONT.
3	1dB TTL CONT.
4	2dB TTL CONT.
5	4dB TTL CONT.
6	8dB TTL CONT.
7	16dB TTL CONT.
8	NO CONNECTION
9	+5Vdc
10	GROUND

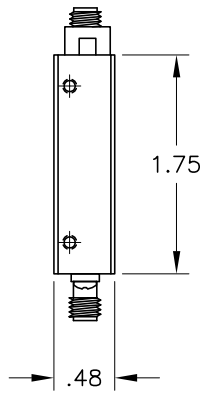

REV	ECN	DATE	BY	APPR		
-	ISSUED	08-21-09	DCK	CLK		
					 <b>JFW INDUSTRIES, INC.</b> www.jfwindustries.com PH: 317-887-1340	
MATERIAL					ALUMINUM ALLOY	PROPRIETARY INFORMATION
FINISH					NICKEL	ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES
MODEL					50P-XXXX	SCALE FULL TOLERANCES .XX±.010 .XXX±.005 .XX±.5'
DESCRIPTION					PROGRAMMABLE ATTENUATOR	DWG # 092-5748-10