

SPECIFICATION SHEET**JFW MODEL 50PA-1197****PROGRAMMABLE ATTENUATOR ASSEMBLY**

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	200-6000 MHz
Attenuation Range	0-95 dB in 1 dB steps
Configuration	24 individually controlled solid-state programmable attenuators with all SMA connectors on rear panel
Enclosure Type	Benchtop
Impedance	50 Ohms nominal
Startup/Default States (configurable)	Maximum attenuation (see ATTEN command) DHCP enabled (see NET command) 4 Ethernet users (see NET command) Prompts off (see PROMPT command) All of these default settings can be changed by user. Unit can be configured for up to 12 Ethernet users.
VSWR	2.0:1 maximum < 1.9:1 typical 200-700 MHz < 1.6:1 typical 700-6000 MHz
Attenuation Accuracy	± 0.50 dB 1-3 dB ± 0.75 dB 4-7 dB ± 1.00 dB 8-11 dB ± 1.25 dB or 4% 12-95 dB (whichever is greater) (guaranteed monotonic)
Insertion Loss	8.8 dB maximum 4.0 dB typical @ 200 MHz 4.5 dB typical @ 700 MHz 8.2 dB typical @ 6000 MHz
RF Input Power	+27 dBm average +33 dBm no damage
Switching Speed	4 microseconds typical (after command is received and processed) (3 milliseconds typical processing time)
Manual Control	20-Button Keypad and LCD display (IP Address configurable via keypad) (Net mask configurable via keypad) (Gateway configurable via keypad) (Baud rate configurable via keypad)
Remote Control	Ethernet (DHCP, TCP/IP, 10/100, up to 12 users) RS-232 (up to 115200 Baud)

--CONTINUED--

SPECIFICATION SHEET

JFW MODEL 50PA-1197

PROGRAMMABLE ATTENUATOR ASSEMBLY

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Remote Commands

Attenuator Control Commands:

Atten, Set Attenuator, Read Attenuator, Set All Attenuators, Read All Attenuators, Read All Extended, Fade Attenuator, Variable Attenuator Handover, Block, Set Block, Read Block, Read All Blocks, Fade Block, Variable Block Handover

System Commands:

Help, Identification, Store, Recall, Pause, Net, Serial, Close, Disconnect, MOTD, Date, Message, Restrict, IDENT, Name, Show Users, Reboot, Uptime, Prompt

RF Connector

SMA female (all on rear panel)

Operating Temperature Range


0°C to +50°C

AC Supply

100-240 VAC @ 47-63 Hz

Physical Size

See outline drawing 092-9685

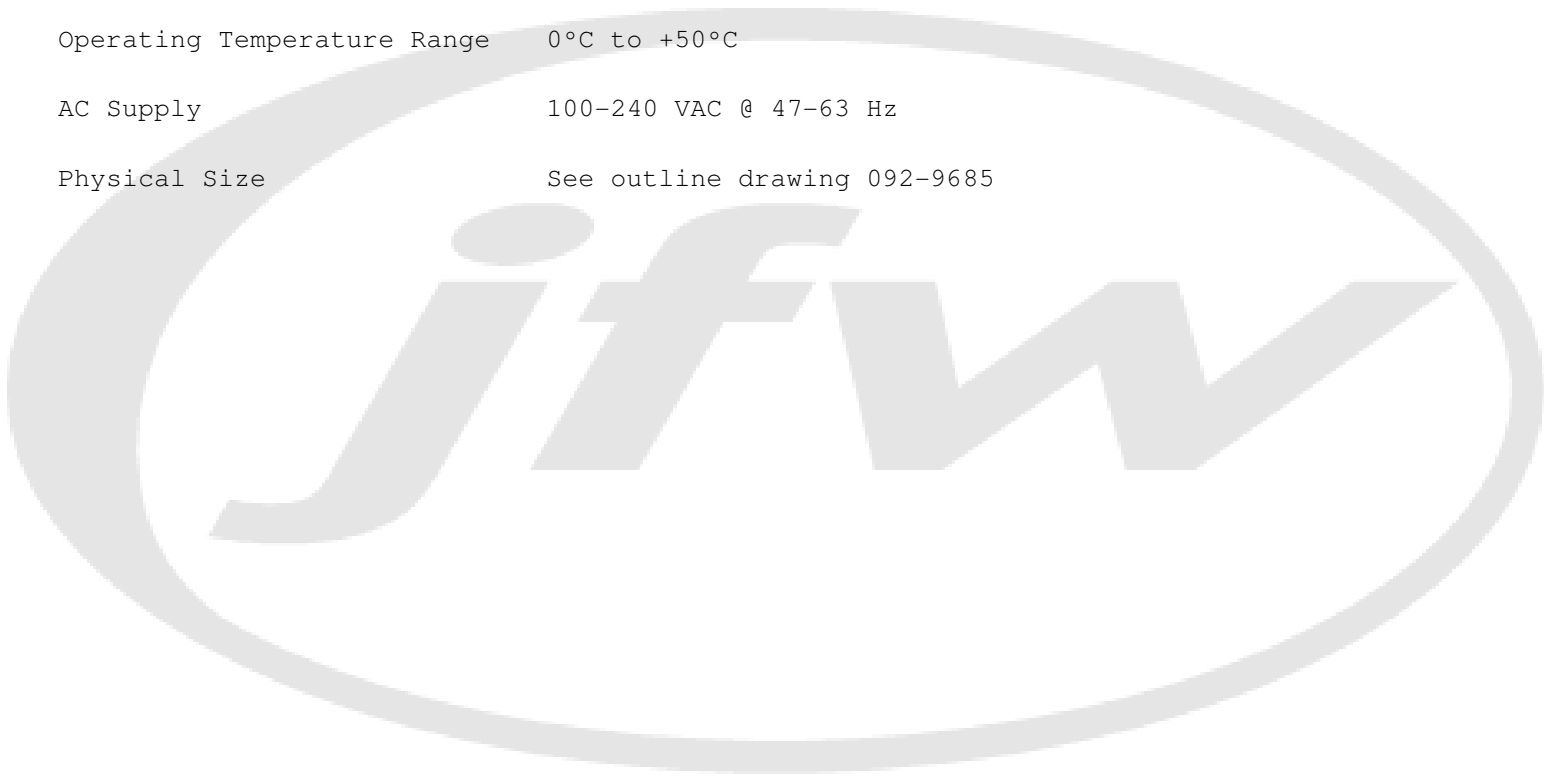

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	01/28/2021		TRS 01/28/2021				