

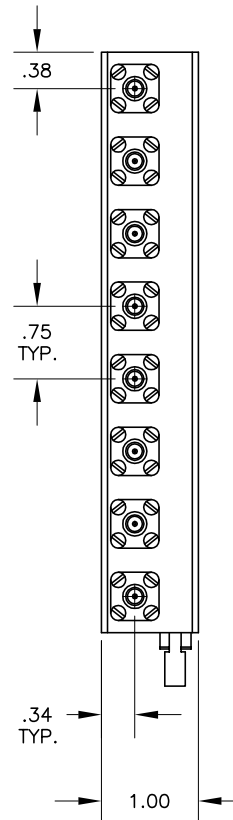
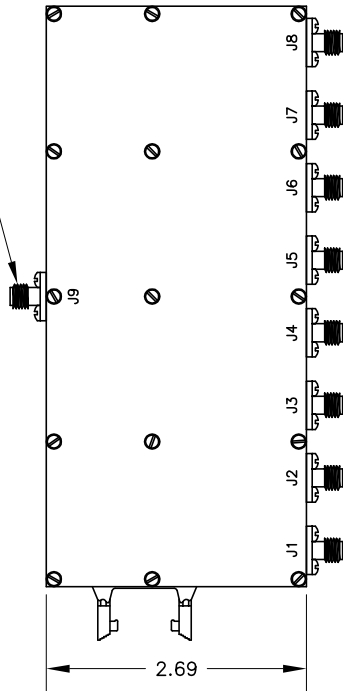



SMA FEMALE
9-PLACES



6-32 x .25 DP
4-PLACES

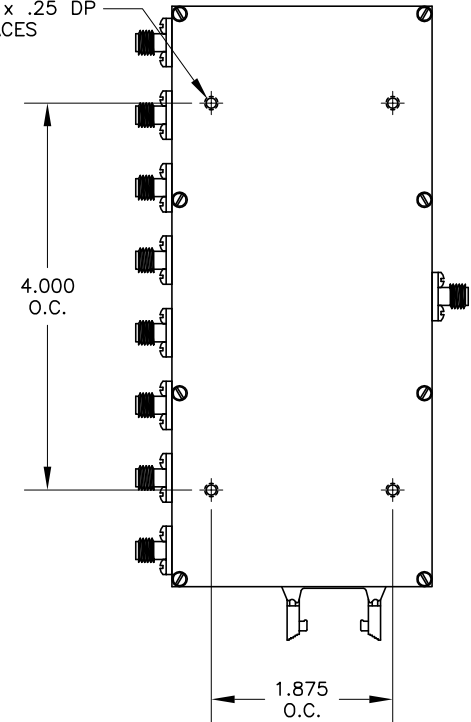


DETAIL A
3M# 3793-5303



PIN	FUNCTION
1	CONTROL 1
2	NO CONNECTION
3	CONTROL 2
4	NO CONNECTION
5	CONTROL 3
6	+5 Vdc
7	CONTROL 4
8	-5 Vdc
9	NO CONNECTION
10	GROUND

J9 TO:	CONT. 1	CONT. 2	CONT. 3	CONT. 4
NONE	0	0	0	0
J1	1	0	0	0
J2	0	1	0	0
J3	1	1	0	0
J4	0	0	1	0
J5	1	0	1	0
J6	0	1	1	0
J7	1	1	1	0
J8	0	0	0	1

		JFW INDUSTRIES, INC. INDIANAPOLIS, IN			PROPRIETARY INFORMATION ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES		
					TOLERANCES FRACTIONAL DIM. ± 1/64 2 PLACE DECIMAL ± .010 3 PLACE DECIMAL ± .005 ANGULAR DIM. ± 1/2° DWG NO.		
REV	ECN	DATE	BY	DRAWN BY	T. ZEISS	DATE	1-28-97
A	5295	6-13-97	TEZ	APP'D BY		SCALE	3/4
B	5396	9-17-97	TEZ	MATERIAL		ALUMINUM ALLOY	
C	5400	9-19-97	CDJ	FINISH		ELECTROLESS NICKEL	
D	6187	2-21-00	TEZ	DESCRIPTION 50S-XXX: 1P8T SWITCH			
E	6989	1-28-02	CMB				

092-2543