

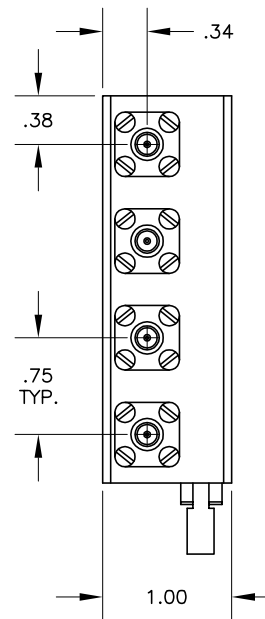
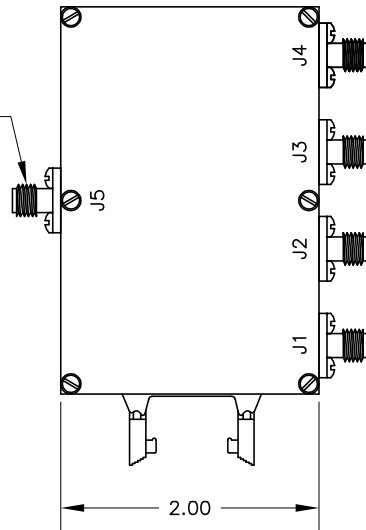



SMA FEMALE
5-PLACES



6-32 x .25 DP
4-PLACES

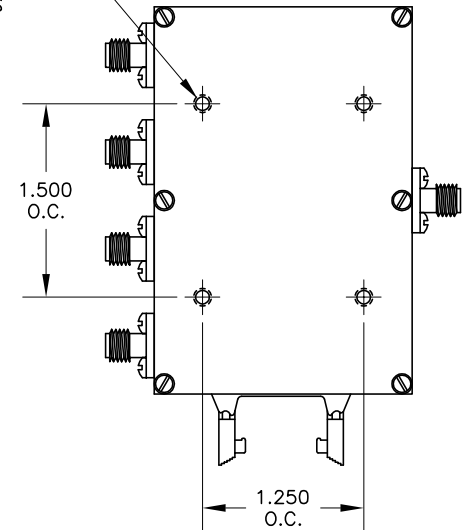

DETAIL A
3M# 3793-5303

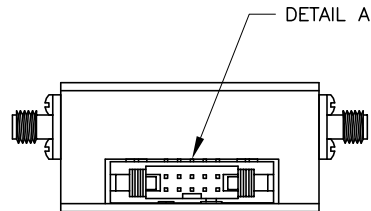

PIN	FUNCTION
1	CONTROL 1
2	NO CONNECTION
3	CONTROL 2
4	NO CONNECTION
5	CONTROL 3
6	+5 Vdc
7	NO CONNECTION
8	-5 Vdc
9	NO CONNECTION
10	GROUND

J5 TO:	CONT. 1	CONT. 2	CONT. 3
NONE	0	0	0
J1	1	0	0
J2	0	1	0
J3	1	1	0
J4	0	0	1

				JFW INDUSTRIES, INC.		PROPRIETARY INFORMATION ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES		
				INDIANAPOLIS, IN				
REV	ECN	DATE	BY	DRAWN BY	T. ZEISS	DATE	1-28-97	TOLERANCES
A	5294	6-16-97	TEZ	APP'D BY		SCALE	FULL	FRACTIONAL DIM. ± 1/64
B	5396	9-17-97	TEZ	MATERIAL	ALUMINUM ALLOY			2 PLACE DECIMAL ± .010
C	5400	9-19-97	CDJ	FINISH	ELECTROLESS NICKEL			3 PLACE DECIMAL ± .005
D	6938	12-6-01	TEZ	DESCRIPTION	50S-XXX: 1P4T SWITCH			ANGULAR DIM. ± 1/2°
E	6989	1-28-02	CMB					DWG NO. 092-2542