


75 Ohm Fixed Attenuators FP Series

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR (maximum)	RF Connectors
75FP-XXX-2G	DC-2000 MHz	1 thru 20 dB in any 1 dB increment	± 0.3 dB DC-1000 MHz ± 0.5 dB or 3% 1000-2000 MHz	1.2:1 DC-500 MHz 1.3:1 500-1000 MHz 1.4:1 1000-2000 MHz	F, BNC, TNC or N
75FP-XXX-3G	DC-3000 MHz	3 thru 20 dB in any 1 dB increment	± 0.3 dB DC-1300 MHz ± 0.5 dB 1300-3000 MHz	1.12:1 DC-1300 MHz 1.3:1 1300-3000 MHz	F or N

* (XXX) insert attenuation value

Model	Impedance	Input Power (@ +25° C)	Peak Power	Operating Temperature
75FP-XXX-2G	75 Ohms	1.0 Watt	1000 Watts	-55° C to +125° C
75FP-XXX-3G	75 Ohms	0.5 Watts	100 Watts	-55° C to +125° C

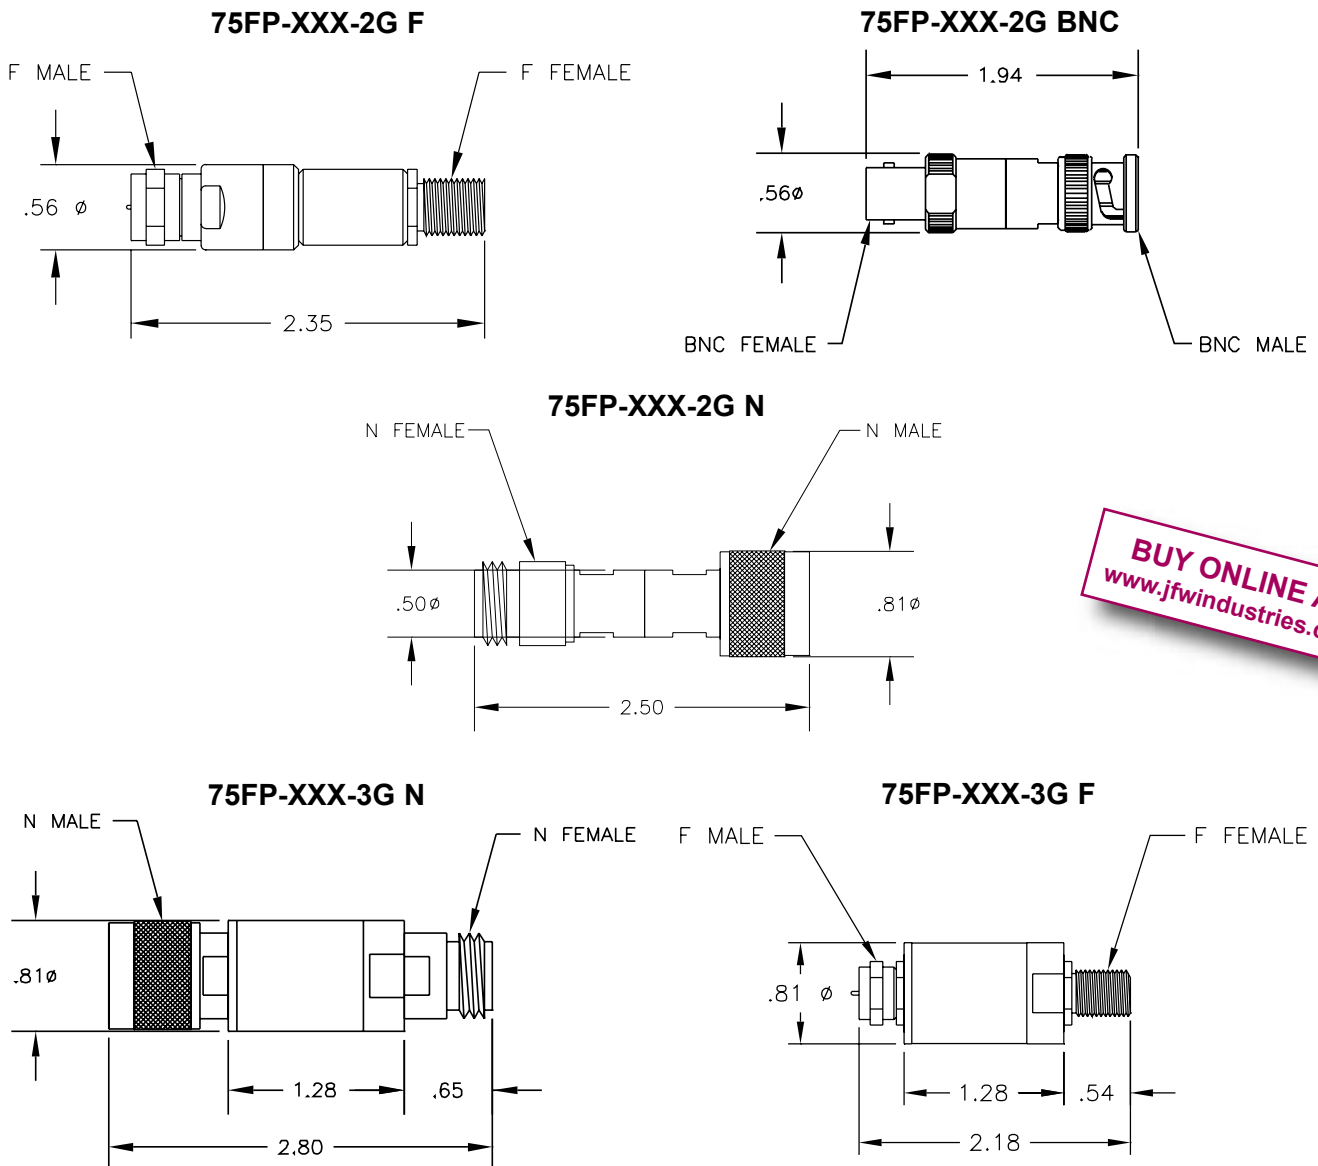

BUY ONLINE AT
www.jfwindustries.com