

6-32 x .250 DP  
6-PLACES


12.000  
O.C.

2.500  
O.C.

MARKING TO BE  
ON OPPOSITE SIDE


F FEMALE  
17-PLACES

14.00



DETAIL A  
DE-9P

J9 TO	CONT.			
	1	2	3	4
J1	0	0	0	0
J2	1	0	0	0
J3	0	1	0	0
J4	1	1	0	0
J5	0	0	1	0
J6	1	0	1	0
J7	0	1	1	0
J8	1	1	1	0
J9	0	0	0	1
J10	1	0	0	1
J11	0	1	0	1
J12	1	1	0	1
J13	0	0	1	1
J14	1	0	1	1
J15	0	1	1	1
J16	1	1	1	1

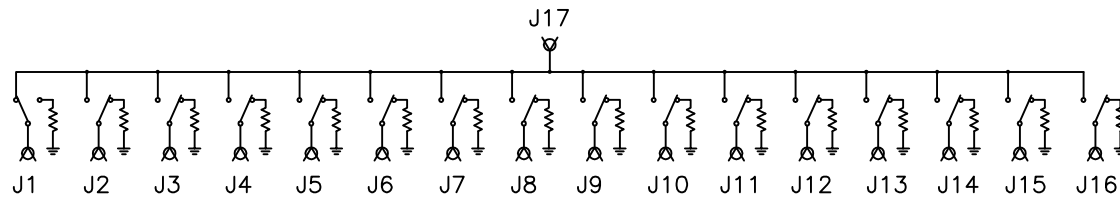

SHOWN WITH NO POWER APPLIED

NOTE : WITH NO POWER APPLIED TO DE-9 CONNECTOR  
COMMON IS FAILSAFE CONNECTED TO J1

PIN	FUNCTION
1	CONTROL 1
2	CONTROL 2
3	CONTROL 3
4	CONTROL 4
5	
6	
7	
8	+12 Vdc
9	GROUND

REV	ECN	DATE	BY	APPR		
-	ISSUED	6-22-00	CMB	PT		
A	17424	7-15-09	BZ	BAC		
					<b>JFW INDUSTRIES, INC.</b> www.jfwindustries.com    PH: 317-887-1340	
MATERIAL			BRASS		PROPRIETARY INFORMATION	
FINISH			NICKEL		ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES	
MODEL			75S-243		TOLERANCES	
DESCRIPTION			1P16T COAX. SWITCH		.XX±.010 .XXX±.005 .XX±.5°	
					SCALE	1/2
					DWG #	092-3394