
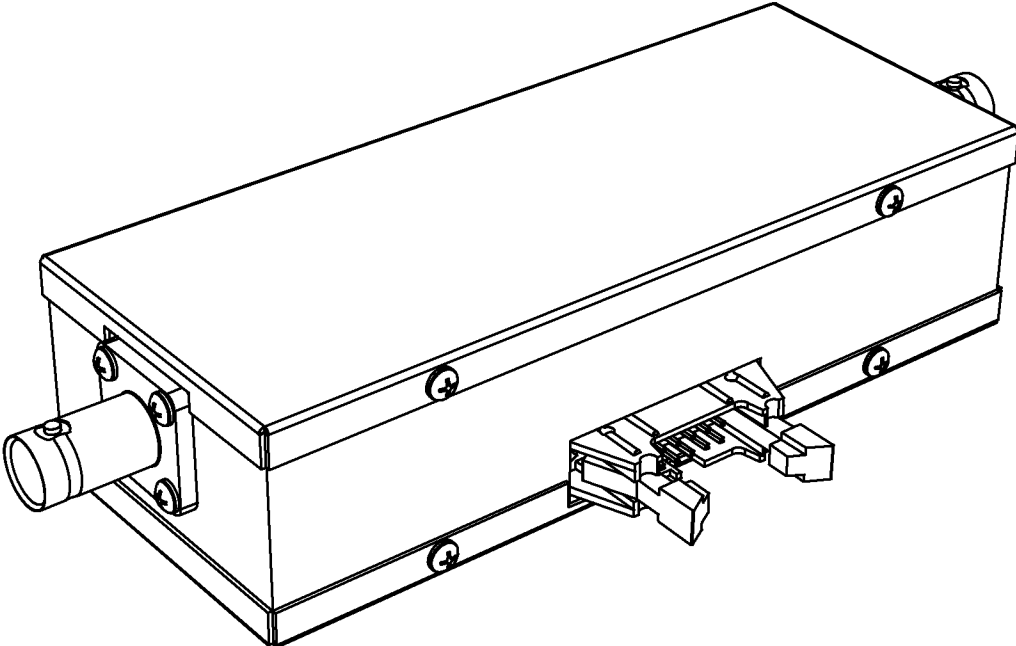


DETAIL A
3M# 3793-5303

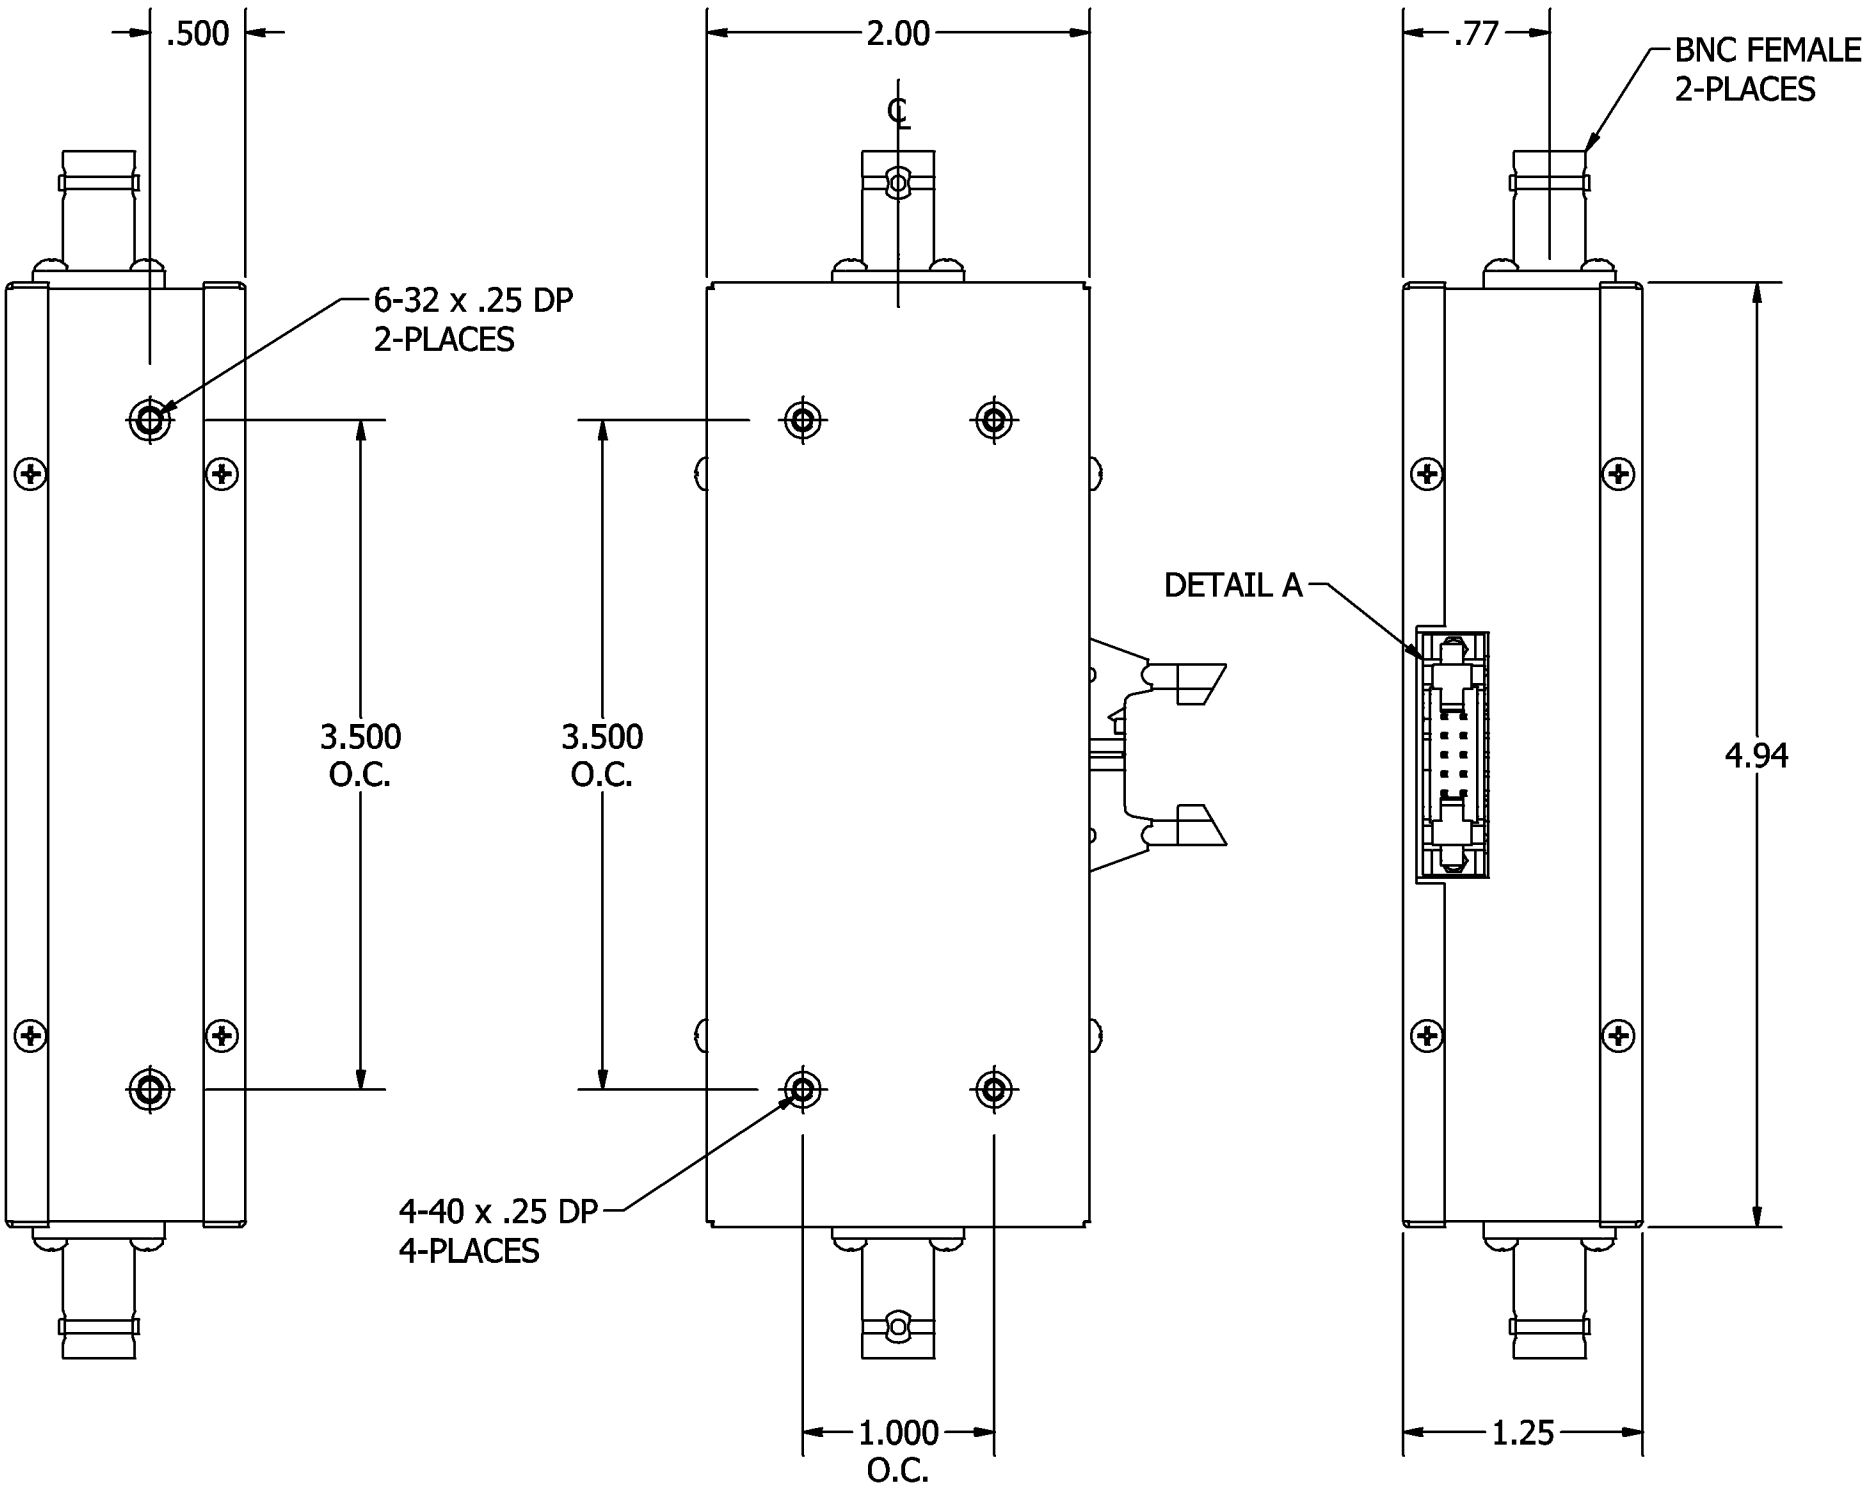

PIN	75P-113	75P-135	75P-154 / -229	75P-155
1	NO CONNECTION	12.8 dB TTL CONT.	32 dB TTL CONT.	32 dB TTL CONT.
2	6.4 dB TTL CONT.	6.4 dB TTL CONT.	16 dB TTL CONT.	32 dB TTL CONT.
3	3.2 dB TTL CONT.	3.2 dB TTL CONT.	8 dB TTL CONT.	16 dB TTL CONT.
4	1.6 dB TTL CONT.	1.6 dB TTL CONT.	4 dB TTL CONT.	8 dB TTL CONT.
5	.8 dB TTL CONT.	.8 dB TTL CONT.	2 dB TTL CONT.	4 dB TTL CONT.
6	.4 dB TTL CONT.	.4 dB TTL CONT.	1 dB TTL CONT.	2 dB TTL CONT.
7	.2 dB TTL CONT.	.2 dB TTL CONT.	.5 dB TTL CONT.	1 dB TTL CONT.
8	.1 dB TTL CONT.	.1 dB TTL CONT.	.25 dB TTL CONT.	.5 dB TTL CONT.
9	+XX Vdc	+XX Vdc	+XX Vdc	+XX Vdc
10	GROUND	GROUND	GROUND	GROUND

REV	ECN	DATE	BY	APPR	 JFW INDUSTRIES, INC. www.jfwindustries.com PH: 317-887-1340	
-	ISSUED	8-22-94	PT	FDW		
A	4878	1-30-96	CDJ	FDW		
B	5879	12-8-98	PT	FDW		
C	7764	3-4-04	DTS	TRS		
D	10287	12-17-04	LT	TEZ		
E	24444	9-25-15	JZ	TEZ		
F	31237	7-23-21	JZ	CLK		
G	33229	3-5-24	JZ	JZ		
					MATERIAL	BRASS
					FINISH	NICKEL
					MODEL	75P-XXX
					DESCRIPTION	PROGRAMMABLE ATTENUATOR
					SCALE	FULL
					TOLERANCES .XX±.010 .XXX±.005 XX°±.5°	
					DWG #	
					092-2213	