


CONNECTOR	DIM. A ±.03			
SMA MALE	.65			
SMA FEMALE	.61			
BNC MALE	.89			
BNC FEMALE	.69			
TNC MALE	.89			
TNC FEMALE	.69			
N MALE	.89			
N FEMALE	.98			
7/16 MALE	1.86			
7/16 FEMALE	1.82			
4.1/9.5 MALE	1.05			
4.1/9.5 FEMALE	1.05			
4.3/10 MALE	1.15			
4.3/10 FEMALE	1.11			

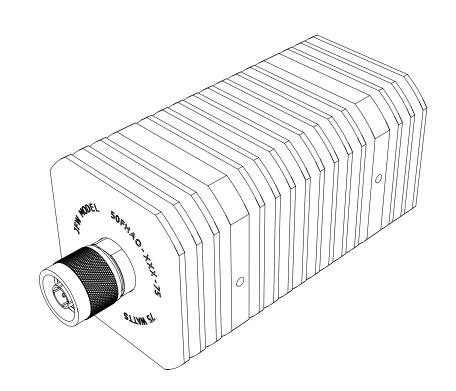

* INSERT NOMINAL ATTEN. VALUE i.e. 030 = 30dB

REV	ECN	DATE	BY	APPR			NICTE	DIEC INC
-	ISSUED	12-13-01	MAH	TEZ	I if	JFW INC	ノしろIF	RIES, INC.
Α	7005	2-6-02	MAH	TEZ				,
В	21520	5-1-12	JZ	TEZ		PH: 317-887-1340		
С	26009	12-15-15	JZ	TEZ	www.jfwindustries.com PH: 317-887-1340			
D	24444	9-11-19	GM	TEZ	ALUMINUM ALLOY		PROPRIETARY INFORMATION	
								TROFRIETART IN ORMATION
					BLACK ANODIZE		ALL SURFACES ARE TO BE FREE	
							OF BURRS, PITS & SCRATCHES	
					MODEL	50FHAO-XXX-75	SCALE FULL	TOLERANCES
								.XX±.010 .XXX±.005 XX°±.5°
					DESCRIPTION			DWG#
					75 WATT FIXED ATTENUATOR			000 0000
					75 WATT FIXED ATTENUATOR		092-3836	
								1