


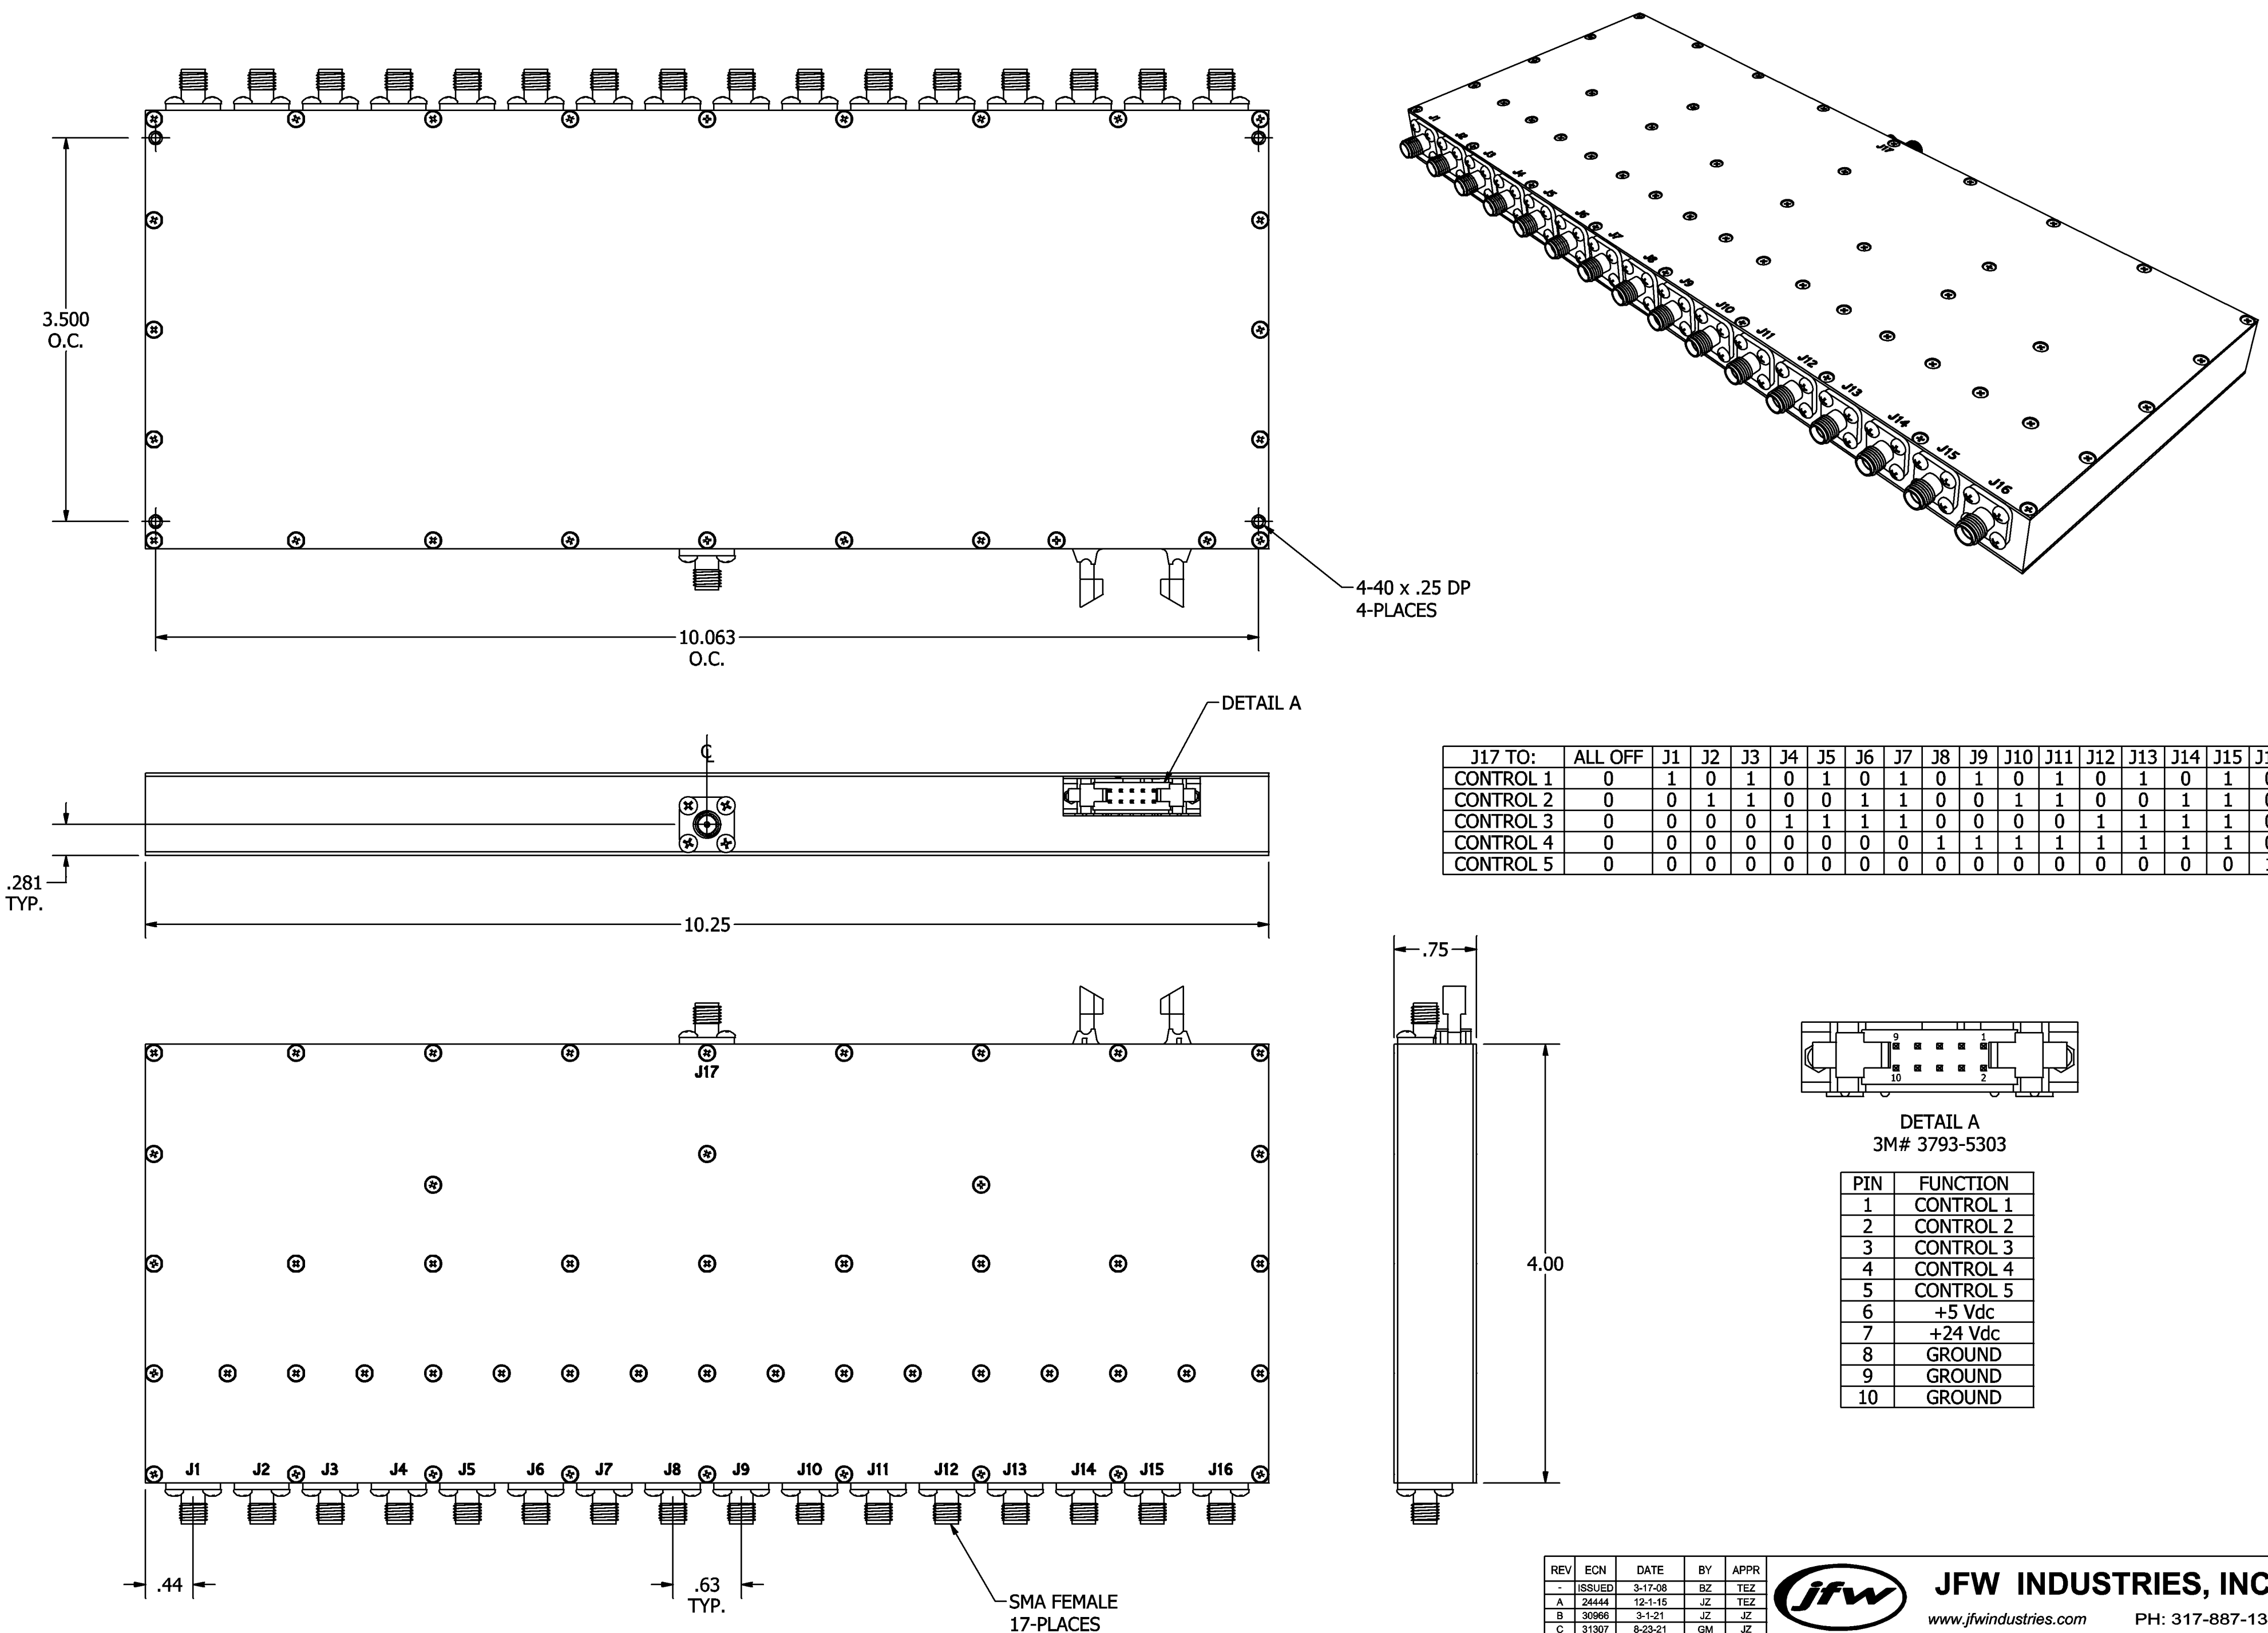

J17 TO:	ALL OFF	J1	J2	J3	J4	J5	J6	J7	J8	J9	J10	J11	J12	J13	J14	J15	J16
CONTROL 1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0
CONTROL 2	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
CONTROL 3	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0
CONTROL 4	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0
CONTROL 5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1

PIN	FUNCTION
1	CONTROL 1
2	CONTROL 2
3	CONTROL 3
4	CONTROL 4
5	CONTROL 5
6	+5 Vdc
7	+24 Vdc
8	GROUND
9	GROUND
10	GROUND

REV	ECN	DATE	BY	APPR	 JFW INDUSTRIES, INC. www.jfwindustries.com PH: 317-887-1340		
-	ISSUED	3-17-08	BZ	TEZ	MATERIAL	ALUMINUM ALLOY	PROPRIETARY INFORMATION
A	24444	12-1-15	JZ	TEZ	FINISH	ELECTROLESS NICKEL	ALL SURFACES ARE TO BE FREE OF BURRS, PITS & SCRATCHES
B	30966	3-1-21	JZ	JZ	MODEL	50S-XXXX	TOLERANCES .XX±.010 .XXX±.005 .XX°±.5°
C	31307	8-23-21	GM	JZ	DESCRIPTION	1P16T SWITCH	DWG # 092-5742