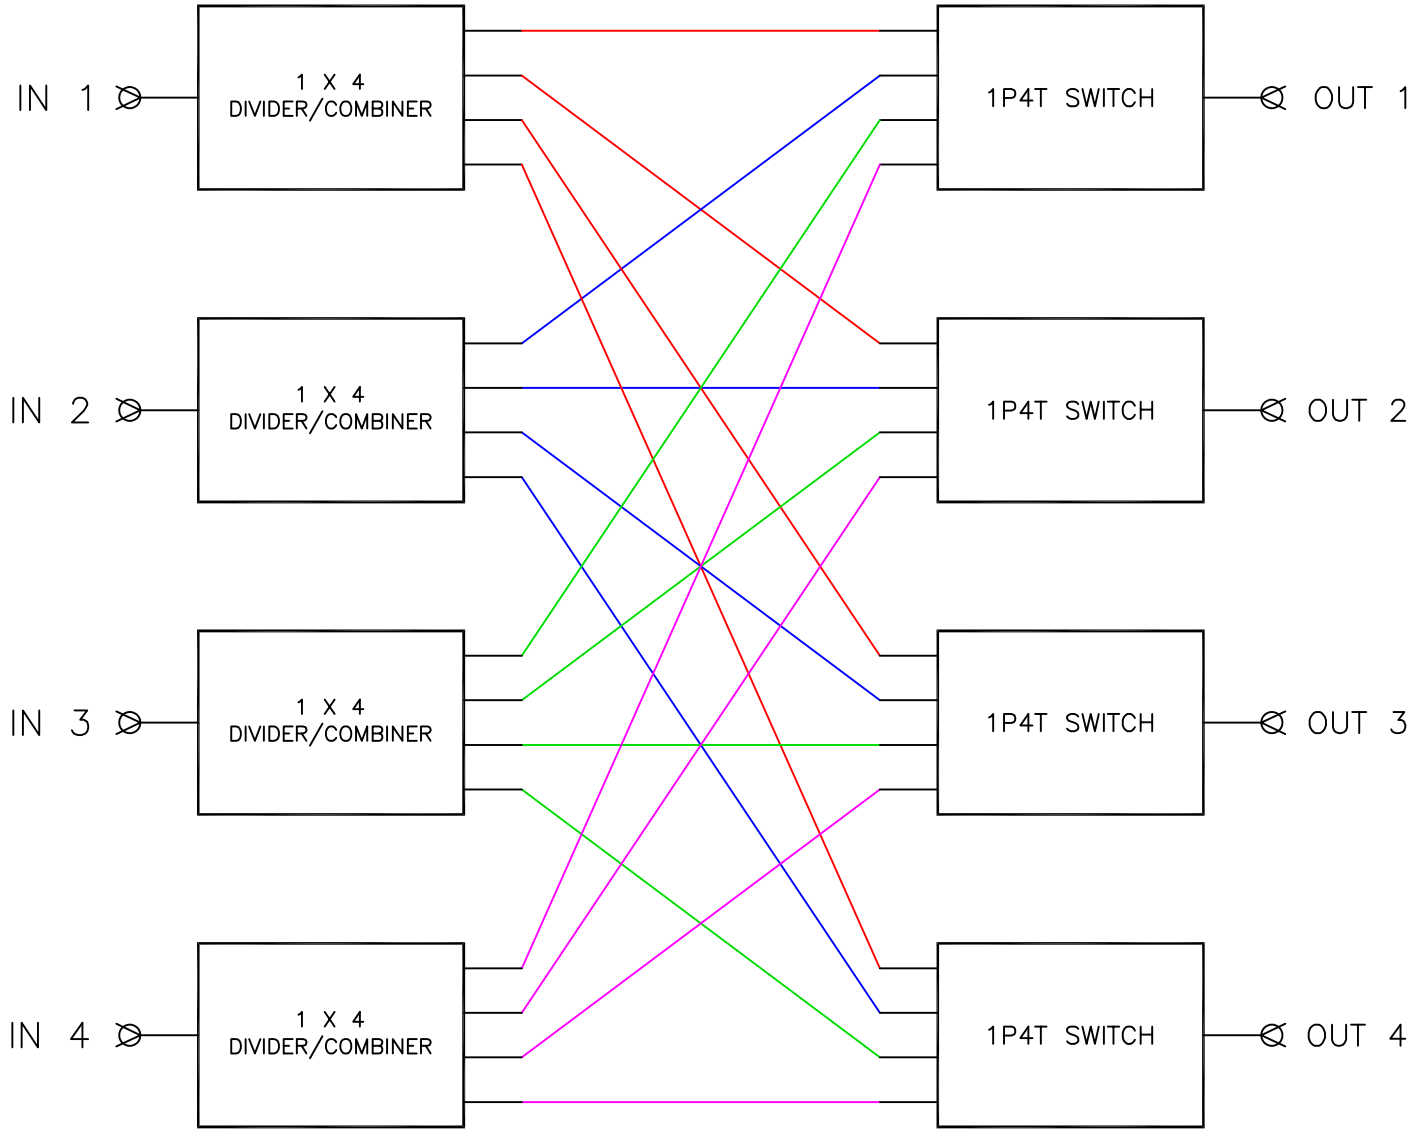

4X4 NON–BLOCKING MATRIX SWITCH

AN INPUT PORT CAN BE CONNECTED TO MULTIPLE OUTPUTS SIMULTANEOUSLY

AN OUTPUT PORT CAN BE CONNECTED TO ONLY ONE INPUT PORT

REV	ECN	DATE	BY	APPR
–	ISSUED	10–23–12	JZ	TEZ
A	25553	7–15–15	DTS	TRS
B	31677	3–16–22	DTS	TRS

JFW INDUSTRIES, INC.

www.jfwindustries.com PH: 317–887–1340

MATERIAL

FINISH

MODEL

SCALE

DESCRIPTION

4X4 NON–BLOCKING MATRIX SWITCH

PROPRIETARY INFORMATION

ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES

TOLERANCES
.XX±.010 .XXX±.005 XX°±.5°

DWG #
092–7494