

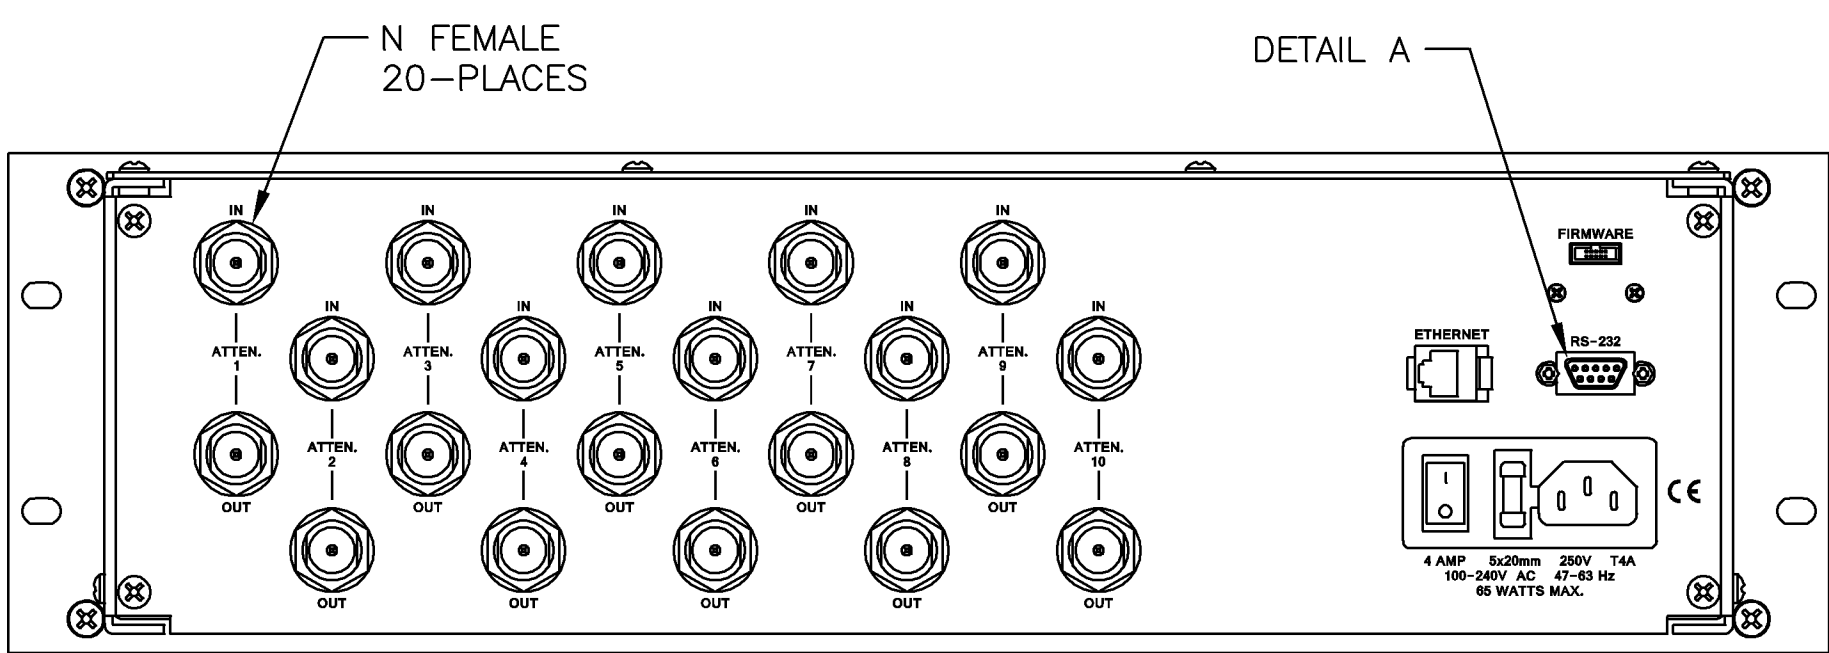



9-12 ATTENUATORS W/ N FEMALE

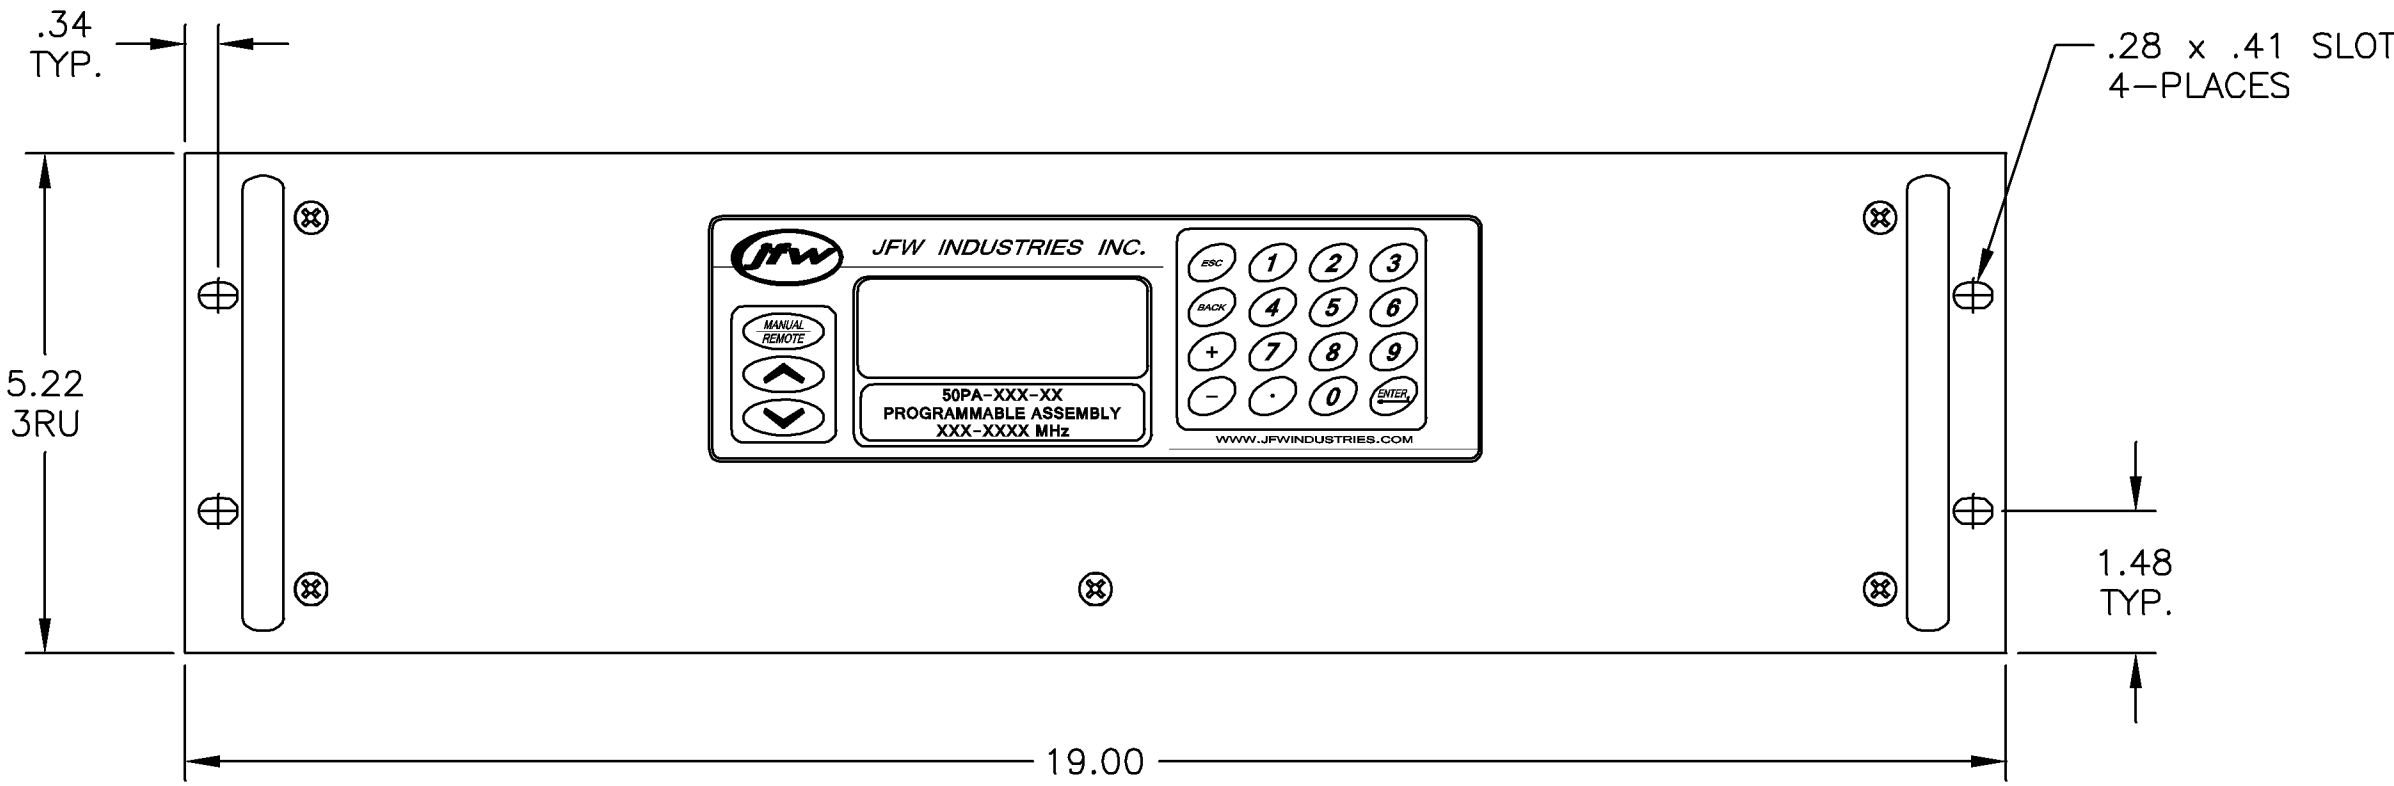

-10  
(i.e. 10 ATTENUATORS)

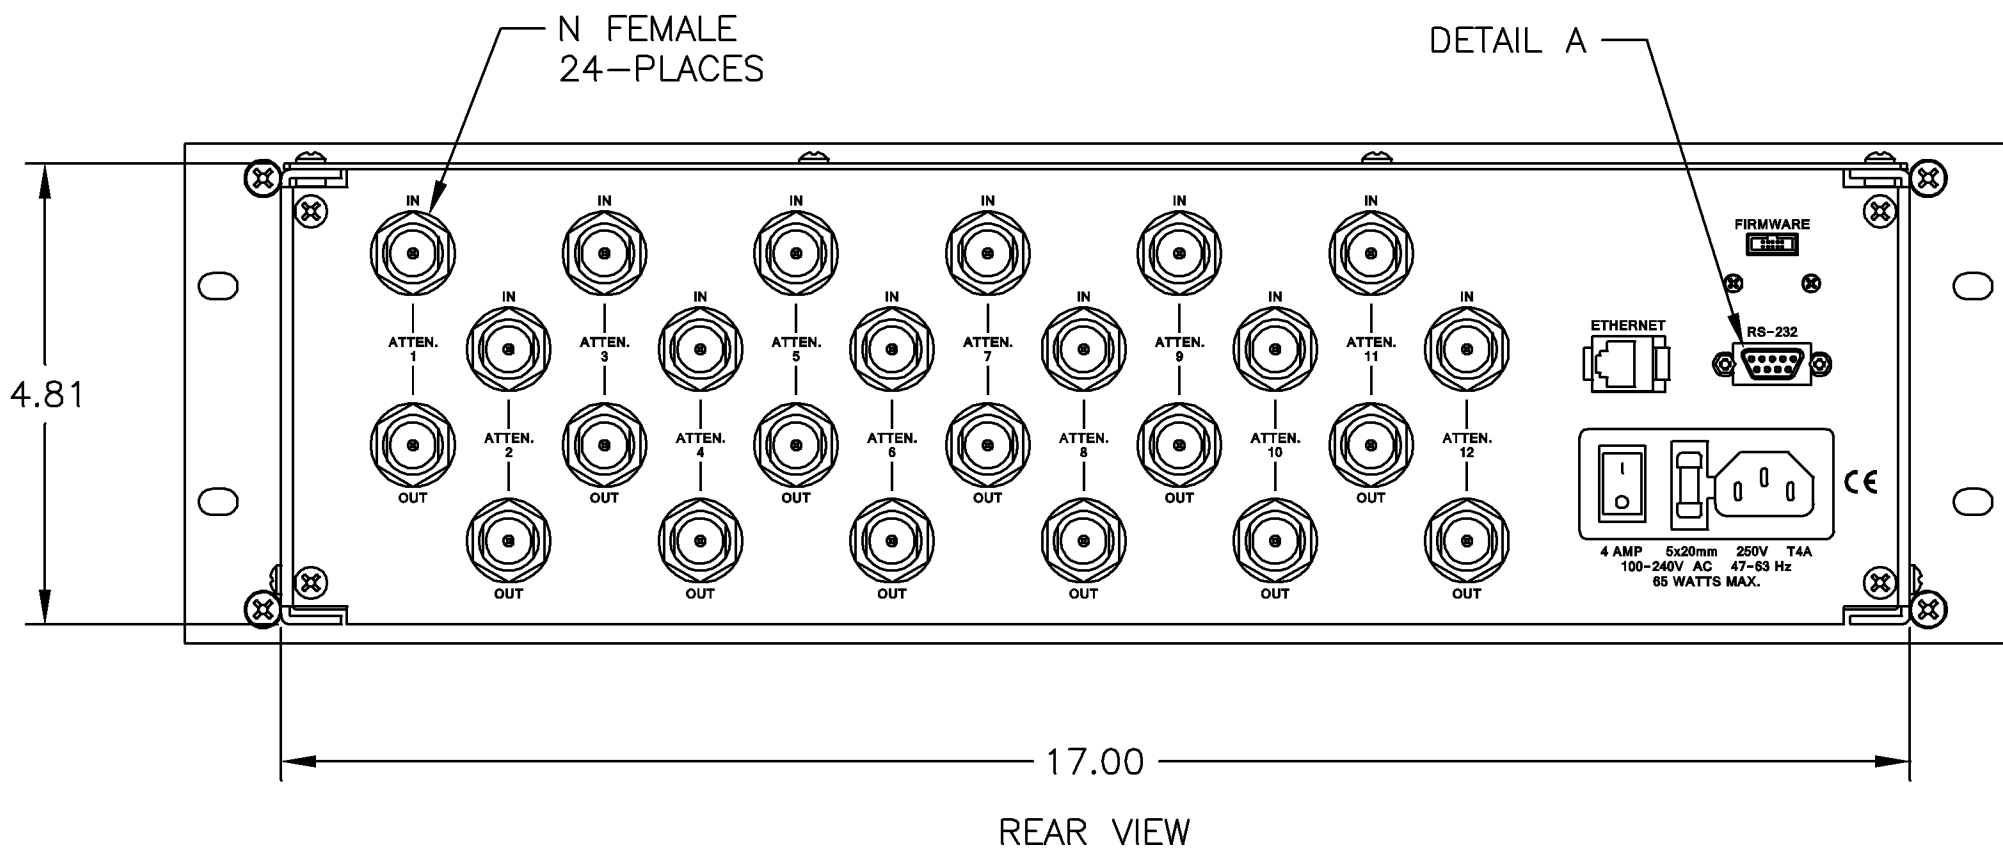


-12  
(i.e. 12 ATTENUATORS)

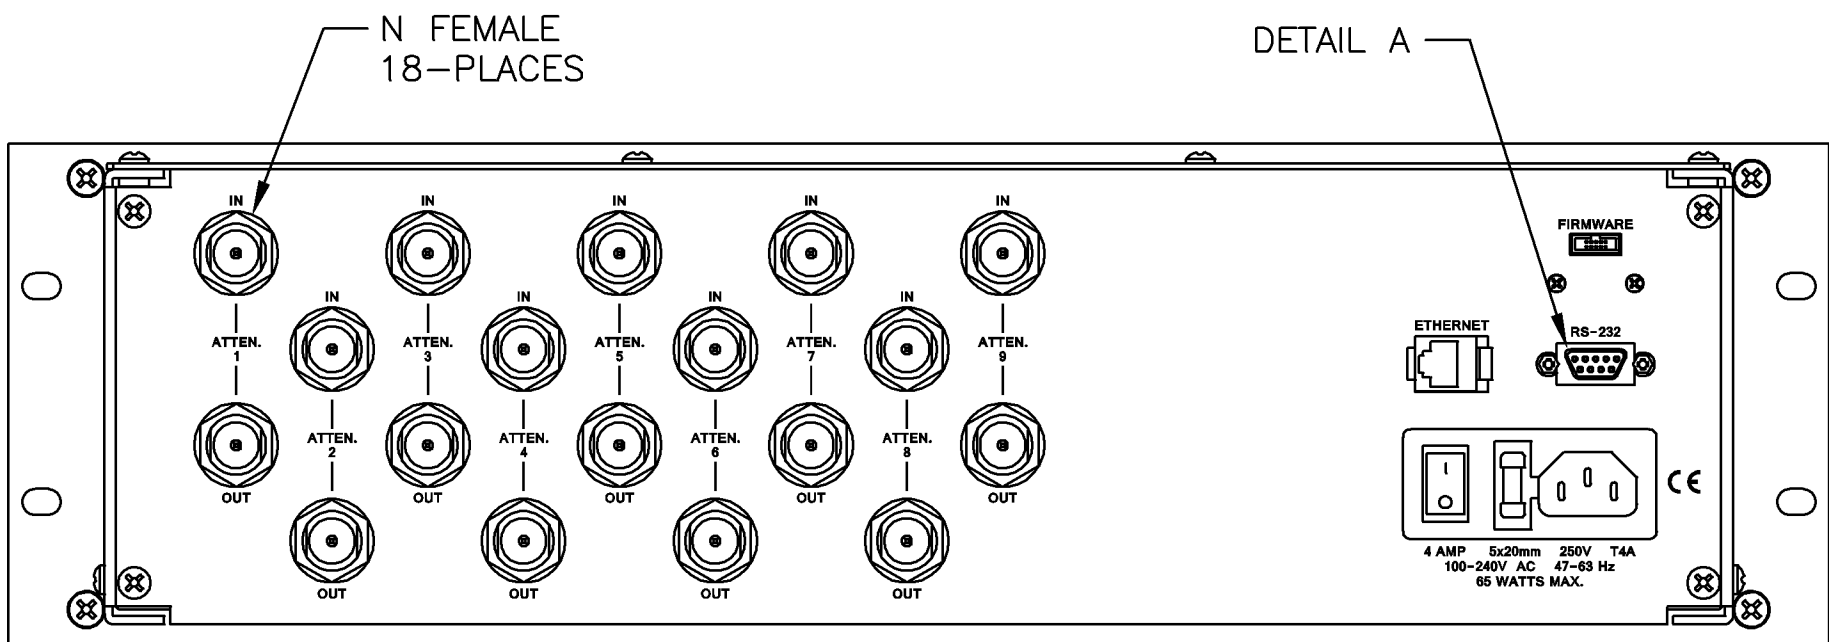

-09  
(i.e. 9 ATTENUATORS)

CHASSIS DEPTH = 17.22 INCHES

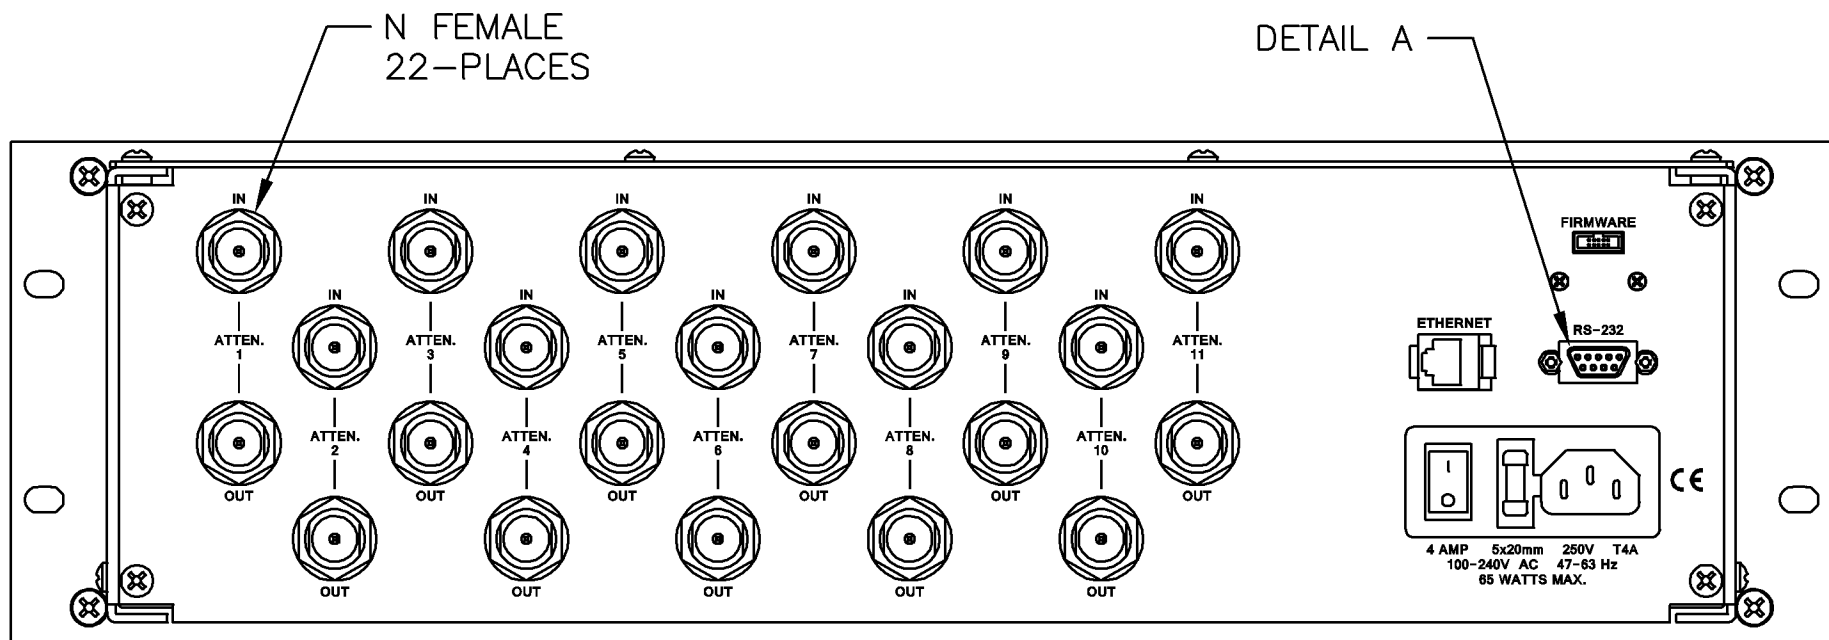

-11  
(i.e. 11 ATTENUATORS)



| PIN | FUNCTION         |
|-----|------------------|
| 1   | CHASSIS GROUND   |
| 2   | RECEIVED DATA    |
| 3   | TRANSMITTED DATA |
| 4   | NO CONNECTION    |
| 5   | SIGNAL GROUND    |
| 6   | NO CONNECTION    |
| 7   | RTS              |
| 8   | CTS              |
| 9   | NO CONNECTION    |

NOTE:  
ALL REAR PANELS ARE SCREENED FOR TWELVE  
ATTENUATORS TO ALLOW FOR FUTURE EXPANSION.  
ONLY USED SECTIONS ARE SHOWN FOR CLARITY.

| REV | ECN    | DATE    | BY | APPR | MATERIAL    | ALUMINUM ALLOY                                          | PROPRIETARY INFORMATION                                 |
|-----|--------|---------|----|------|-------------|---------------------------------------------------------|---------------------------------------------------------|
| -   | ISSUED | 8-6-15  | JZ | TEZ  | FINISH      | CHEMFILM TCP / FRONT: BLACK                             | ALL SURFACES ARE TO BE FREE OF BURRS, FITS, & SCRATCHES |
| A   | 25876  | 11-3-15 | JZ | TRS  | MODEL       | 50PA-XXX-XX                                             | TOLERANCES                                              |
| B   | 26703  | 6-9-16  | JZ | TRS  | SCALE       | 1/2                                                     | XXX±010 .XXX±005 XX±.5"                                 |
| C   | 27610  | 9-11-17 | JZ | JZ   | DESCRIPTION | PROGRAMMABLE ASSEMBLIES<br>9-12 ATTENUATORS W/ N FEMALE | 092-8383                                                |