
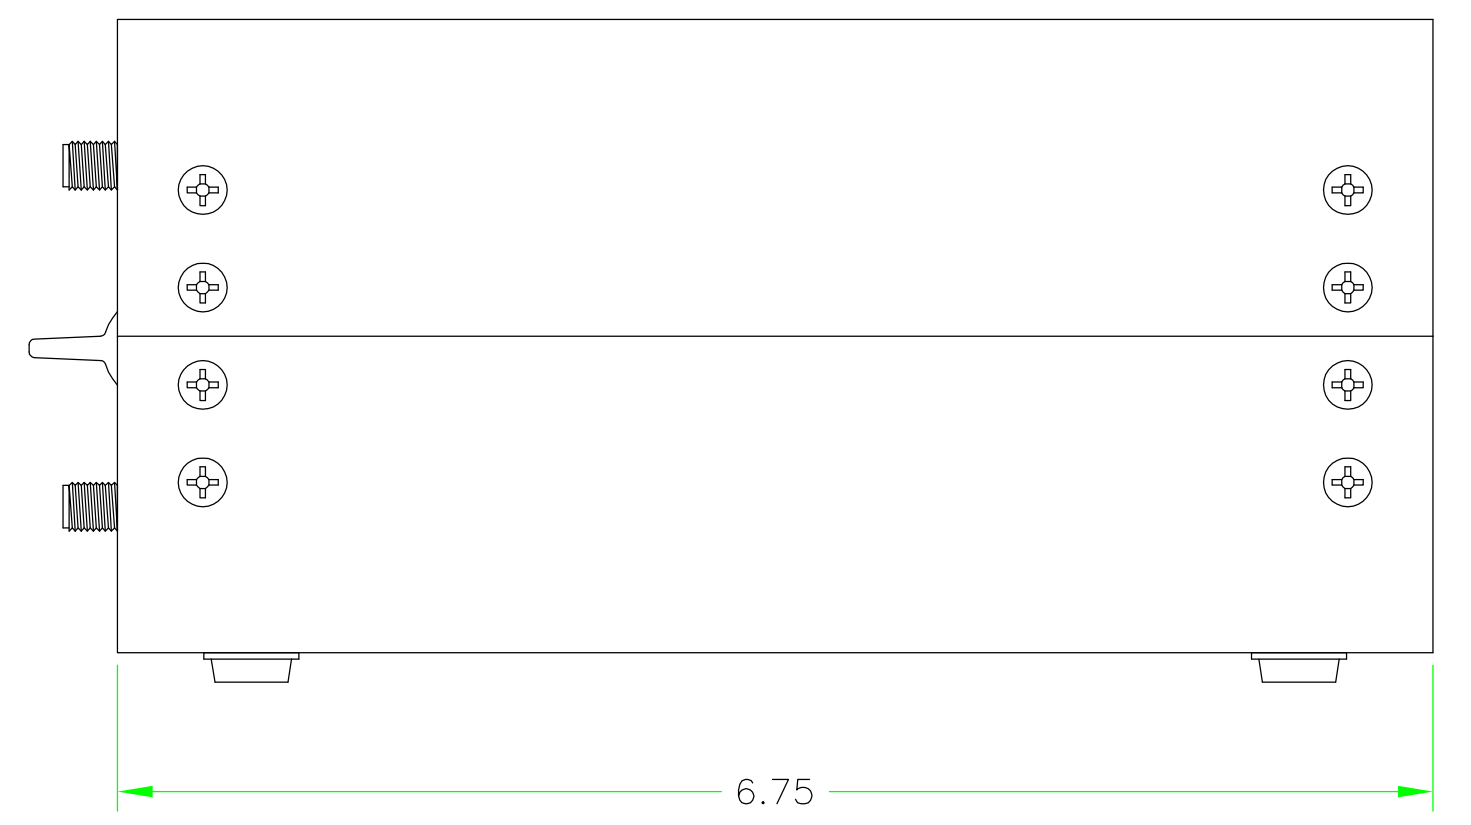


2.92MM FEMALE 4-PLACES


CURRENT ATTENUATION DISPLAYED

MOMENTARY SWITCH FOR MANUAL CONTROL 2-PLACES TAP TO STEP HOLD TO JOG

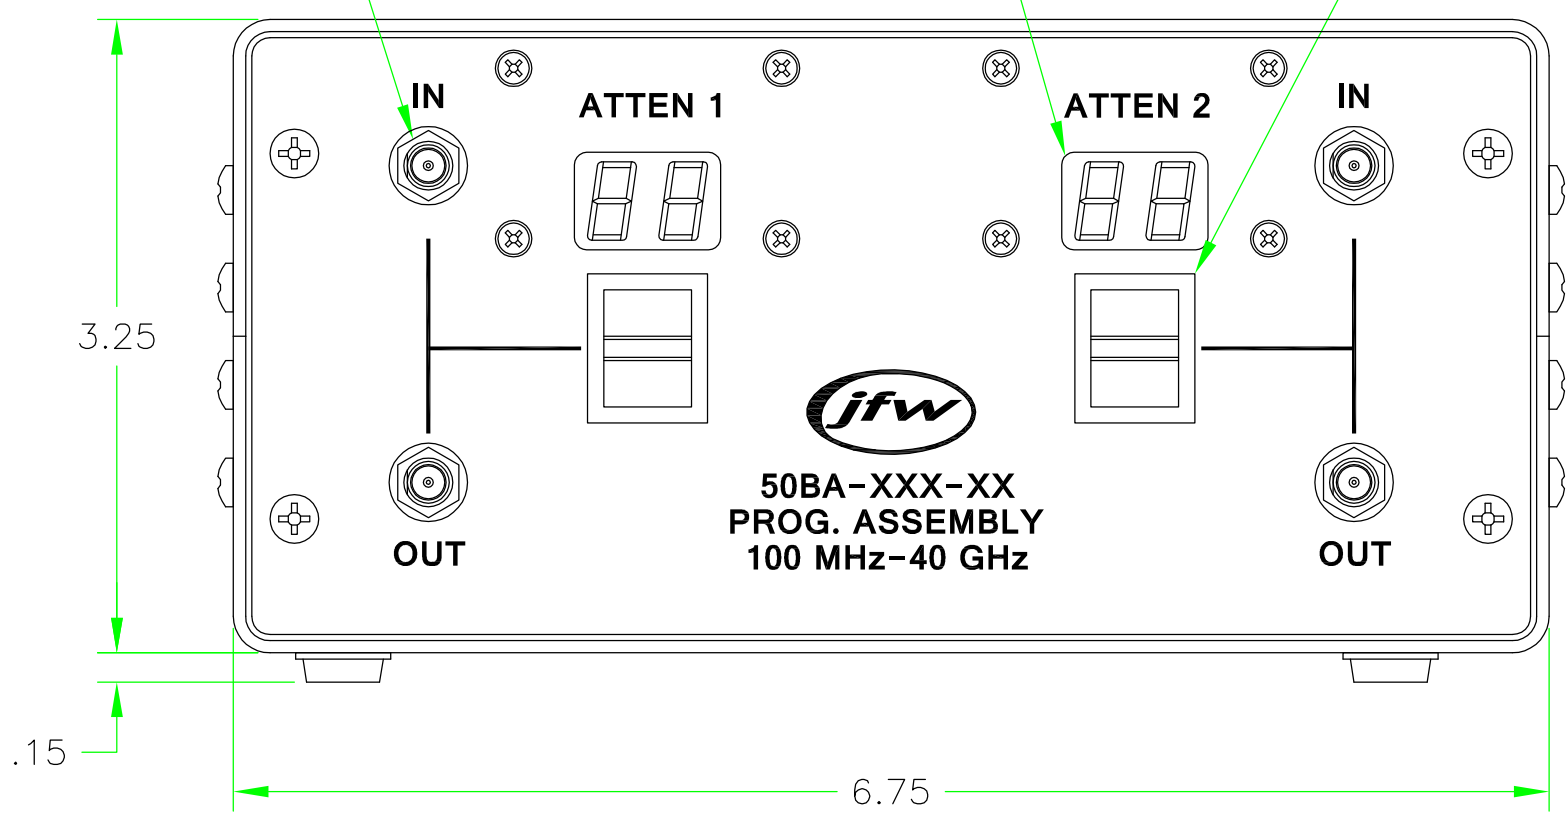

SWITCHCRAFT 712A JACK ACCEPTS .22 Ø PLUG SEE NOTE

DETAIL A

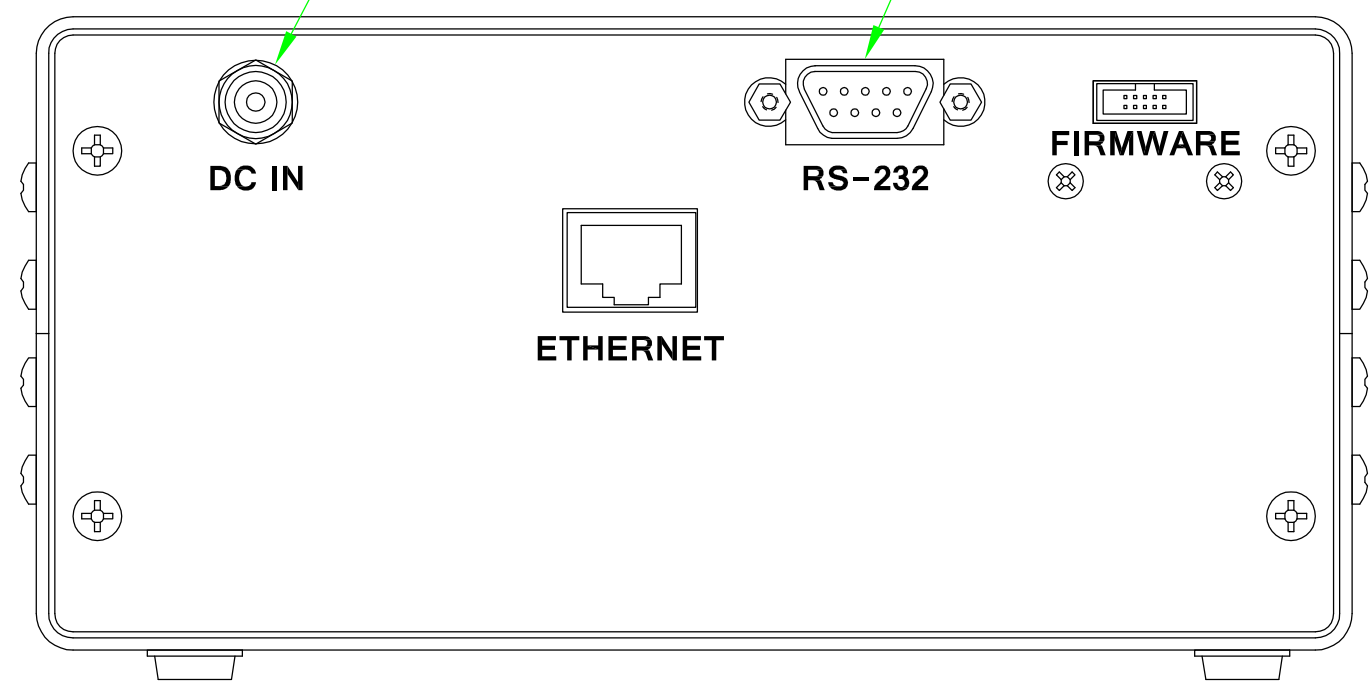

REAR VIEW

PIN	FUNCTION
1	CHASSIS GROUND
2	RECEIVED DATA
3	TRANSMITTED DATA
4	NO CONNECTION
5	SIGNAL GROUND
6	NO CONNECTION
7	RTS
8	CTS
9	NO CONNECTION

DETAIL A  
DE-9S

NOTE:  
THIS UNIT IS SUPPLIED WITH A 12 VOLT TRANSFORMER (100-240VAC)

REV	ECN	DATE	BY	APPR			
-	ISSUED	11-21-16	TEZ	BAC			
					<b>JFW INDUSTRIES, INC.</b> www.jfwindustries.com PH: 317-887-1340		
					MATERIAL	ALUMINUM ALLOY	PROPRIETARY INFORMATION
					FINISH	CASE: BLACK PAINT / FRONT & REAR: GRAY PAINT	ALL SURFACES ARE TO BE FREE OF BURRS, PITS, & SCRATCHES
					MODEL	50BA-XXX-XX	TOLERANCES .XX±.010 .XXX±.005 XX'±.5'
					DESCRIPTION	MINI BENCHTOP ATTENUATOR	DWG # 092-8741
					SCALE	FULL	