

SPECIFICATION SHEET

JFW MODEL 50FH-XXX-50-3

FIXED ATTENUATOR

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-3000 MHz

Impedance 50 Ohms nominal

Attenuation Values 1 through 50 dB (any 1 dB increment)

VSWR 1.4:1 maximum

Attenuation Accuracy ± 0.5 dB


RF Input Power (bi-directional) 50 Watts average @ +25°C
Derate to 25 Watts @ +85°C

Peak Power 1000 Watts

RF Connector BNC, N, TNC, SMA, 4.1-9.5, 4.3-10.0 or 7/16

Operating Temperature Range -55°C to +100°C

Physical Size See outline drawing 092-310

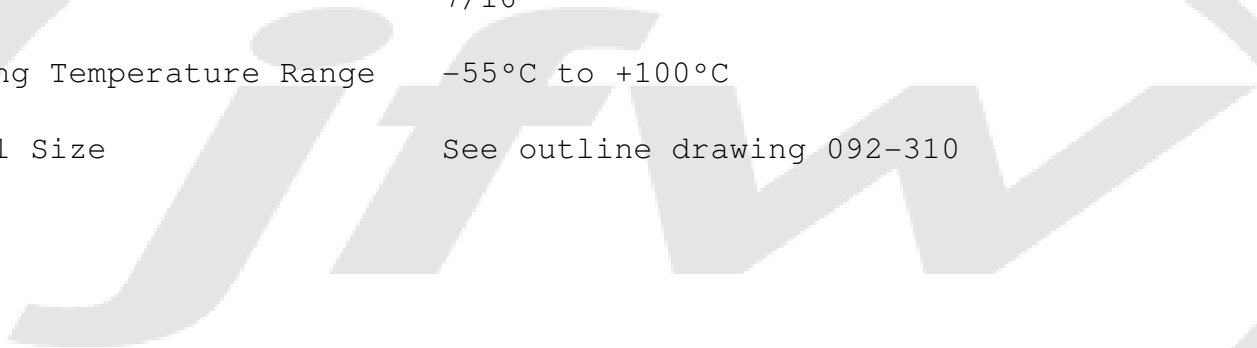

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
2816	11/01/2001	A		9999	07/24/2003	B	SL 09/18/2003
4401	12/23/2003	C	CLV 12/29/2003	26007	12/14/2015	E	CLK 12/14/2015
4500	03/01/2004	D	CLV 03/03/2004	32782	08/18/2023	F	TRS 08/18/2023