

SPECIFICATION SHEET**JFW MODEL 50FHAO-XXX-75****FIXED ATTENUATOR**

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-3000 MHz

Impedance 50 Ohms nominal

Attenuation Values 1 thru 50 dB in any 1 dB increment

VSWR For 1-14 dB: 1.4:1 maximum
For 15-50 dB: 1.3:1 maximum

Attenuation Accuracy ± 0.5 dB


RF Input Power 75 Watts average @ +25°C
(bi-directional) Derate to 37.5 Watts @ +85°C

Peak Power 1000 Watts (1 microsecond pulse)

RF Connector SMA, N, BNC, TNC, 4.1-9.5, 4.3-10.0 or 7/16

Operating Temperature Range -55°C to +100°C

Physical Size See outline drawing 092-3836

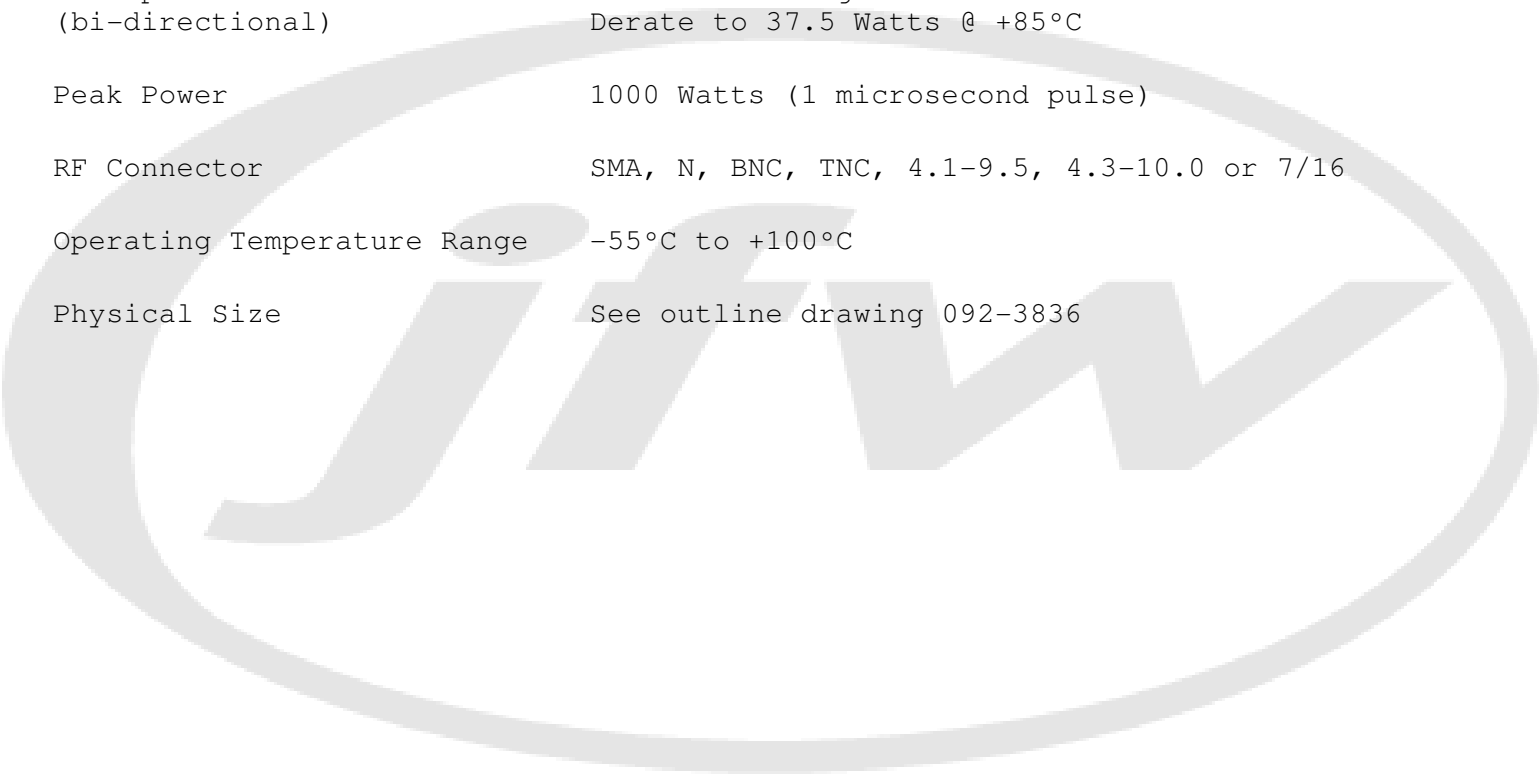

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
18119	01/15/2010	C	SMR 01/15/2010	20424	08/03/2011	F	TRS 08/05/2011
19004	08/13/2010	D	TRS 08/13/2010	26007	12/14/2015	G	CLK 12/14/2015
20288	07/01/2011	E	TRS 07/01/2011	32782	08/18/2023	H	TRS 08/18/2023