

SPECIFICATION SHEET

JFW MODEL 50T-708

TERMINATION

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-18 GHz

Impedance 50 Ohms nominal

VSWR 1.4:1 maximum
1.05:1 typical @ 6 GHz
1.16:1 typical @ 12 GHz
1.23:1 typical @ 18 GHz


RF Input Power 30 Watts average @ +25°C
Derated linearly to 0 Watt @ +125°C

Peak Power 500 Watts
(5 microsecond pulse, 0.1% duty cycle)

RF Connector N or SMA
(male or female)

Temperature Range -55°C to +125°C

Outline Drawing Numbers 092-10146-01 (N male)
092-10146-02 (SMA male)
092-10146-03 (N female)
092-10146-04 (SMA female)

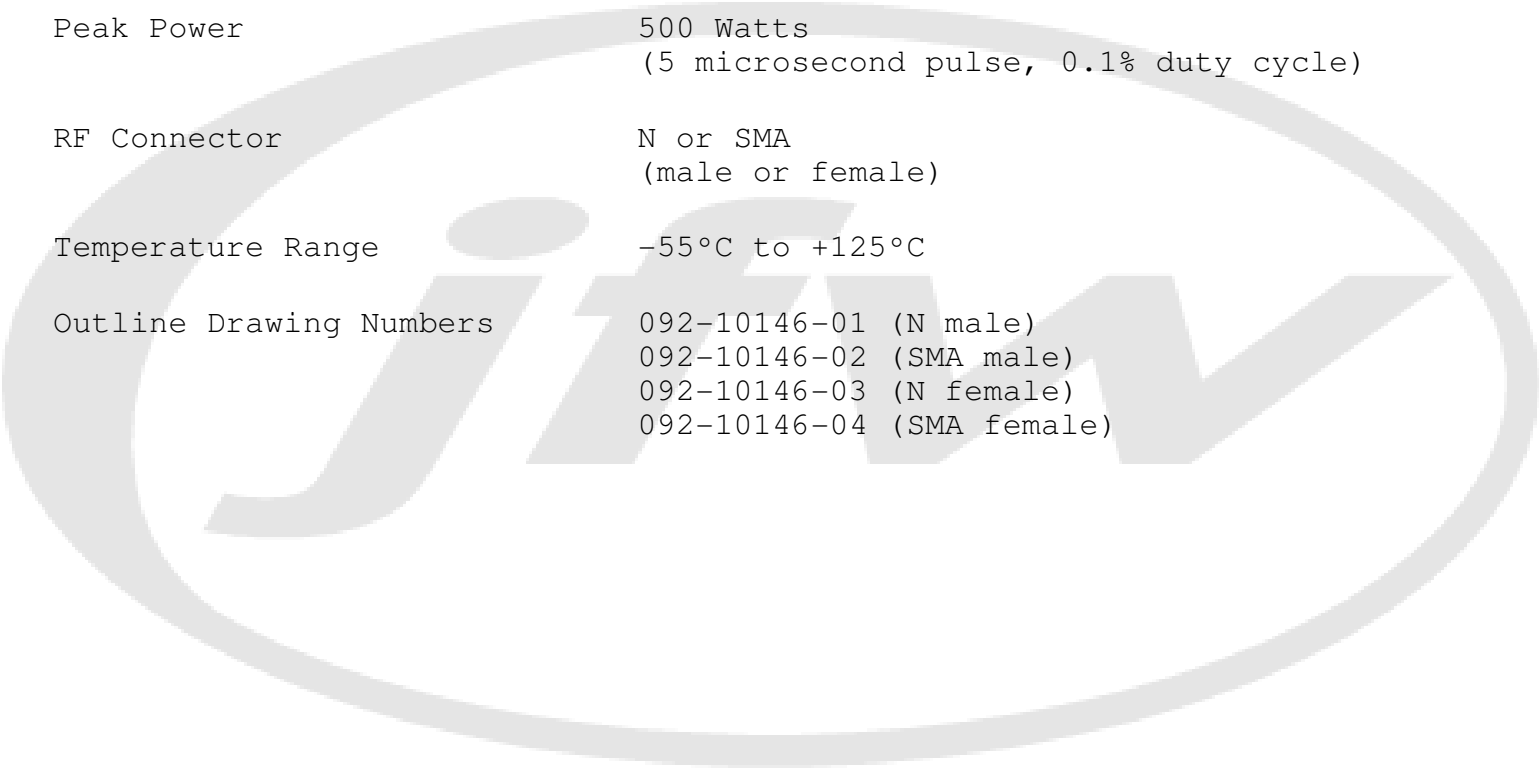

| ECR/ECN # | DATE | REV | APPR / DATE | ECR/ECN # | DATE | REV | APPR / DATE |
|-----------|------------|-----|----------------|-----------|------|-----|-------------|
| | 09/08/2023 | | TRS 09/08/2023 | | | | |
| 33062 | 12/18/2023 | A | TRS 12/18/2023 | | | | |