

SPECIFICATION SHEET

JFW MODEL 50PD-135

4 WAY RESISTIVE POWER DIVIDER

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range DC-2000 MHz

Impedance 50 Ohms nominal

VSWR 1.4:1 maximum
1.2:1 typical

Insertion Loss 12 dB ± 0.6 dB


Amplitude Tracking ± 0.6 dB

RF Input Power 2 Watts average @ 25°C
100 Watts peak (1 microsecond)

Operating Temperature Range -40°C to +85°C

RF Connector N or BNC female

Physical Size See outline drawing 092-2328-04 (N)
092-6646-04 (BNC)

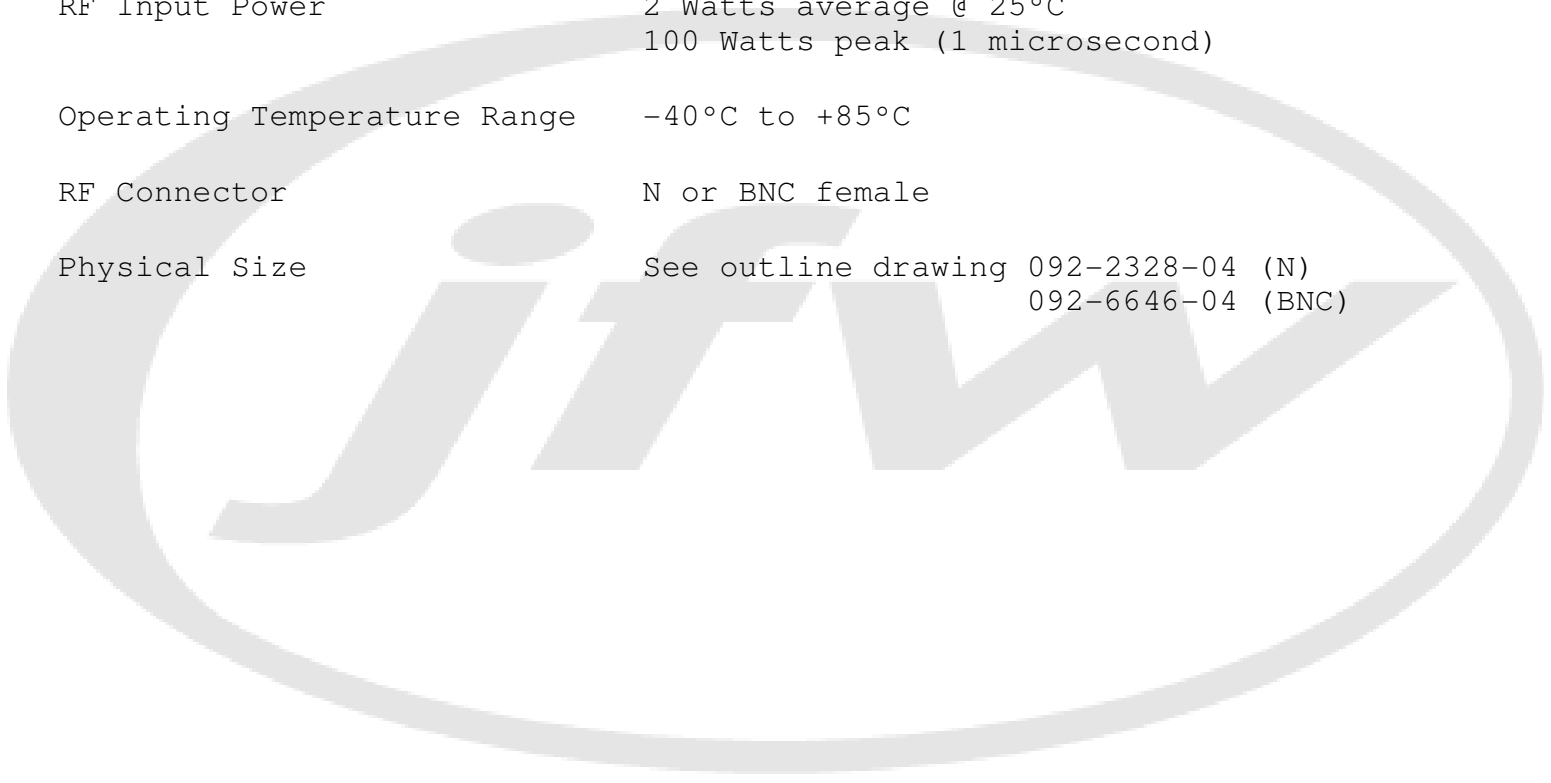

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	06/15/1995			9999	11/16/2002	C	SL 11/27/2002
873	11/03/1997	A		18885	07/15/2010	D	TRS 07/15/2010
2434	07/20/2000	B		31756	04/29/2022	E	TRS 04/29/2022