

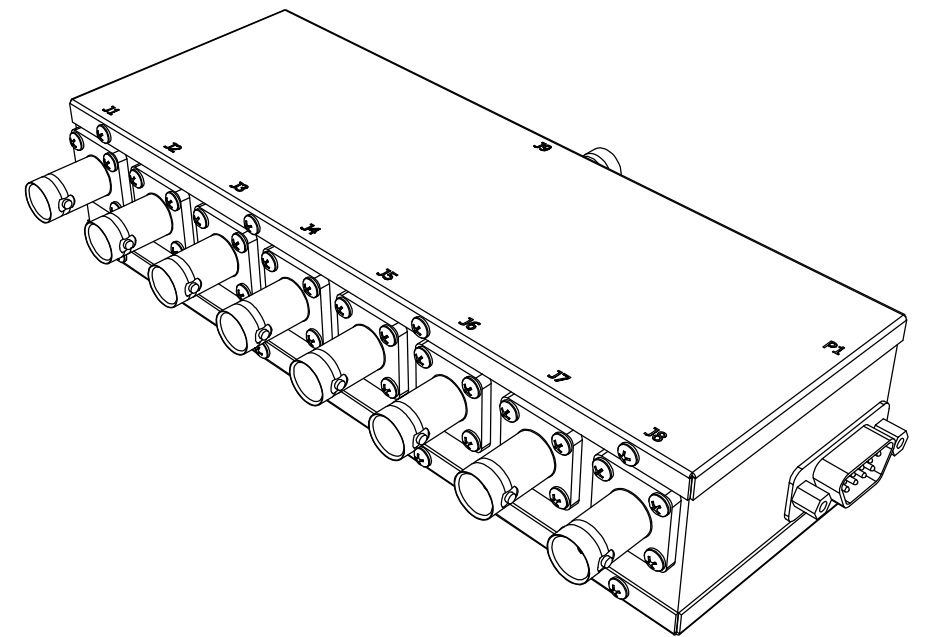


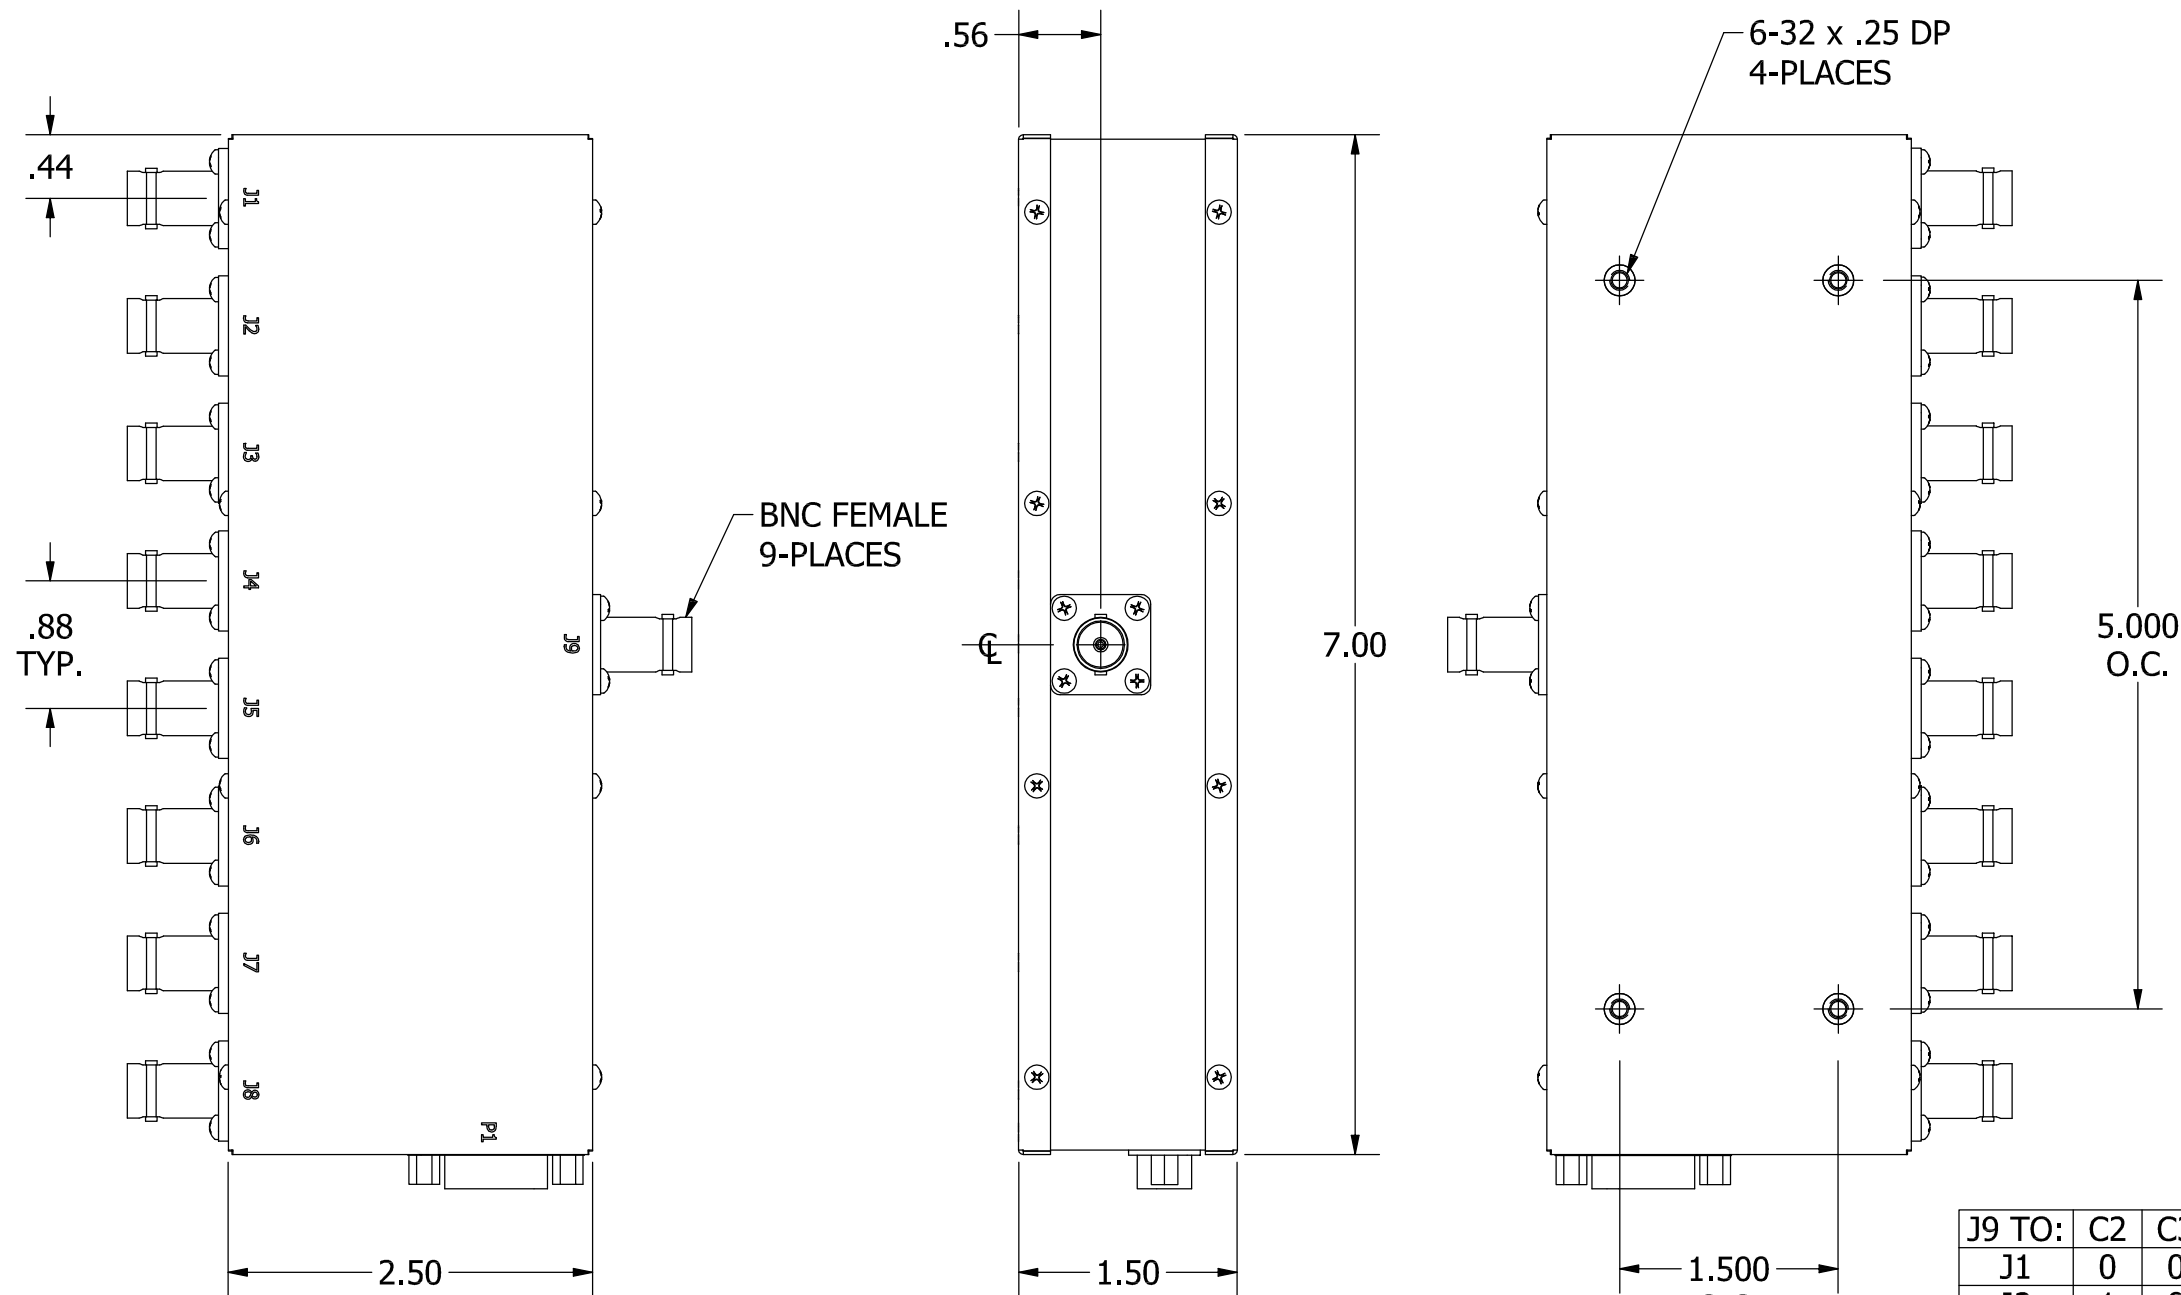



NOTE:
WITH NO POWER APPLIED
TO DE-9 CONNECTOR,
COMMON IS FAILSAFE
CONNECTION TO J1

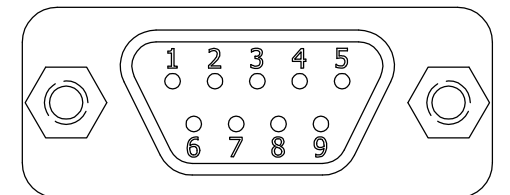

DETAIL A
DE-9P

J9 TO:	C2	C3	C4	C5	C6	C7	C8
J1	0	0	0	0	0	0	0
J2	1	0	0	0	0	0	0
J3	0	1	0	0	0	0	0
J4	0	0	1	0	0	0	0
J5	0	0	0	1	0	0	0
J6	0	0	0	0	1	0	0
J7	0	0	0	0	0	1	0
J8	0	0	0	0	0	0	1

PIN	FUNCTION
1	GROUND
2	CONTROL 2
3	CONTROL 3
4	CONTROL 4
5	CONTROL 5
6	CONTROL 6
7	CONTROL 7
8	CONTROL 8
9	GROUND

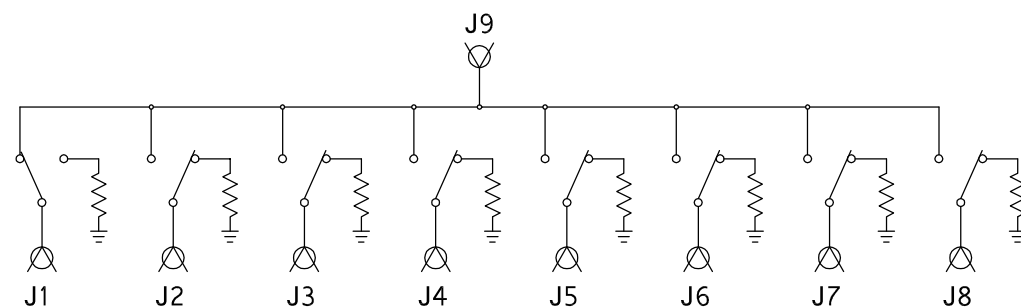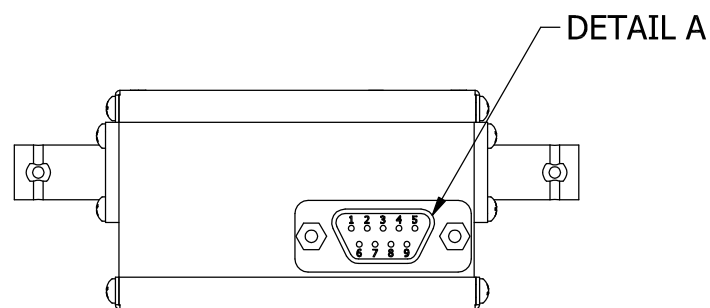

SHOWN WITH NO POWER APPLIED

REV	ECN	DATE	BY	APPR	 JFW INDUSTRIES, INC. www.jfwindustries.com PH: 317-887-1340		
-	ISSUED	5-7-98	CDJ	FDW			
A	7720	1-23-04	BZ	TEZ			
B	23609	1-2-14	BZ	TEZ			
C	24444	12-18-15	JZ	TEZ			
MATERIAL					BRASS	PROPRIETARY INFORMATION	
FINISH					NICKEL	ALL SURFACES ARE TO BE FREE OF BURRS, PITS & SCRATCHES	
MODEL					50S-XXX & 75S-XXX	SCALE 3/4	TOLERANCES .XX±.010 .XXX±.005 XX°±.5°
DESCRIPTION					1P8T COAX. SWITCH		DWG # 092-2792